

Sanderson

1 COLOURS / **6** SIZES / **3** FINISHES / **0** SPECIAL PIECES

Sanderson is a striking dark marble tile with bold veining that comes in three finishes and 6 sizes in the 10mm and in 6mm thick slabs in 3200x1600, 1600x1600, 1200x2400. and 1200x1200




Sanderson





Sizes
400x800mm
600x1200mm
600x300mm
600x600mm
800x1800mm
800x800mm

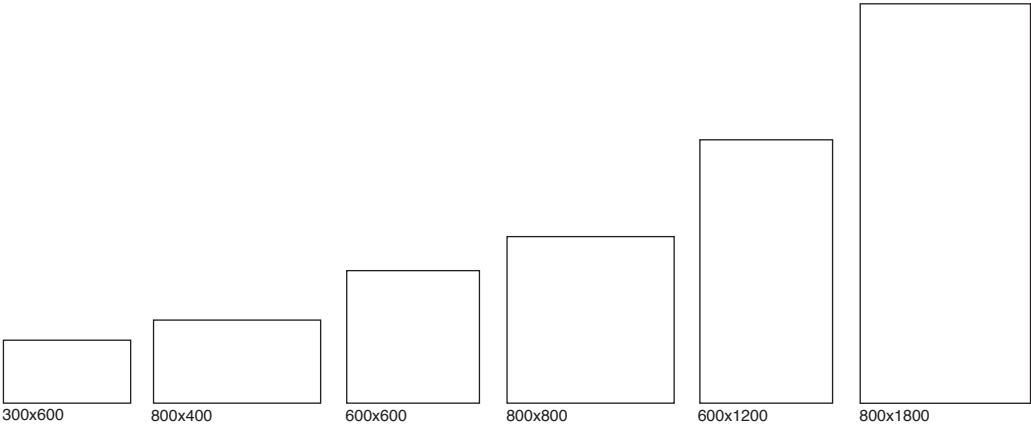

GROUP / Bla - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave 0.08%
Breaking strength	ISO 10545-4	$\geq 1300N$	Ave 3200N
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	Ave min 50 N/mm ²
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	$\geq 175mm^2$	Ave 140mm ²
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULB
Resistance to stain	ISO 10545-14	Declare Value	Class 4
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
Sanderson	0

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles