


Sedgwick

4 COLOURS / 1 SIZES / 1 FINISHES / 0 SPECIAL PIECES

Six geometric and three-dimensional surfaces, designed to create architectural spaces using wall tiles that are brought to life by light and shadow. Available in a small size of 50x200mm and available in four dusty colours, Bianco, Terra, Salvia and Notte. A collection that is capable of astounding you by the simplicity of its elements but the impact of it's design.



Sedgwick

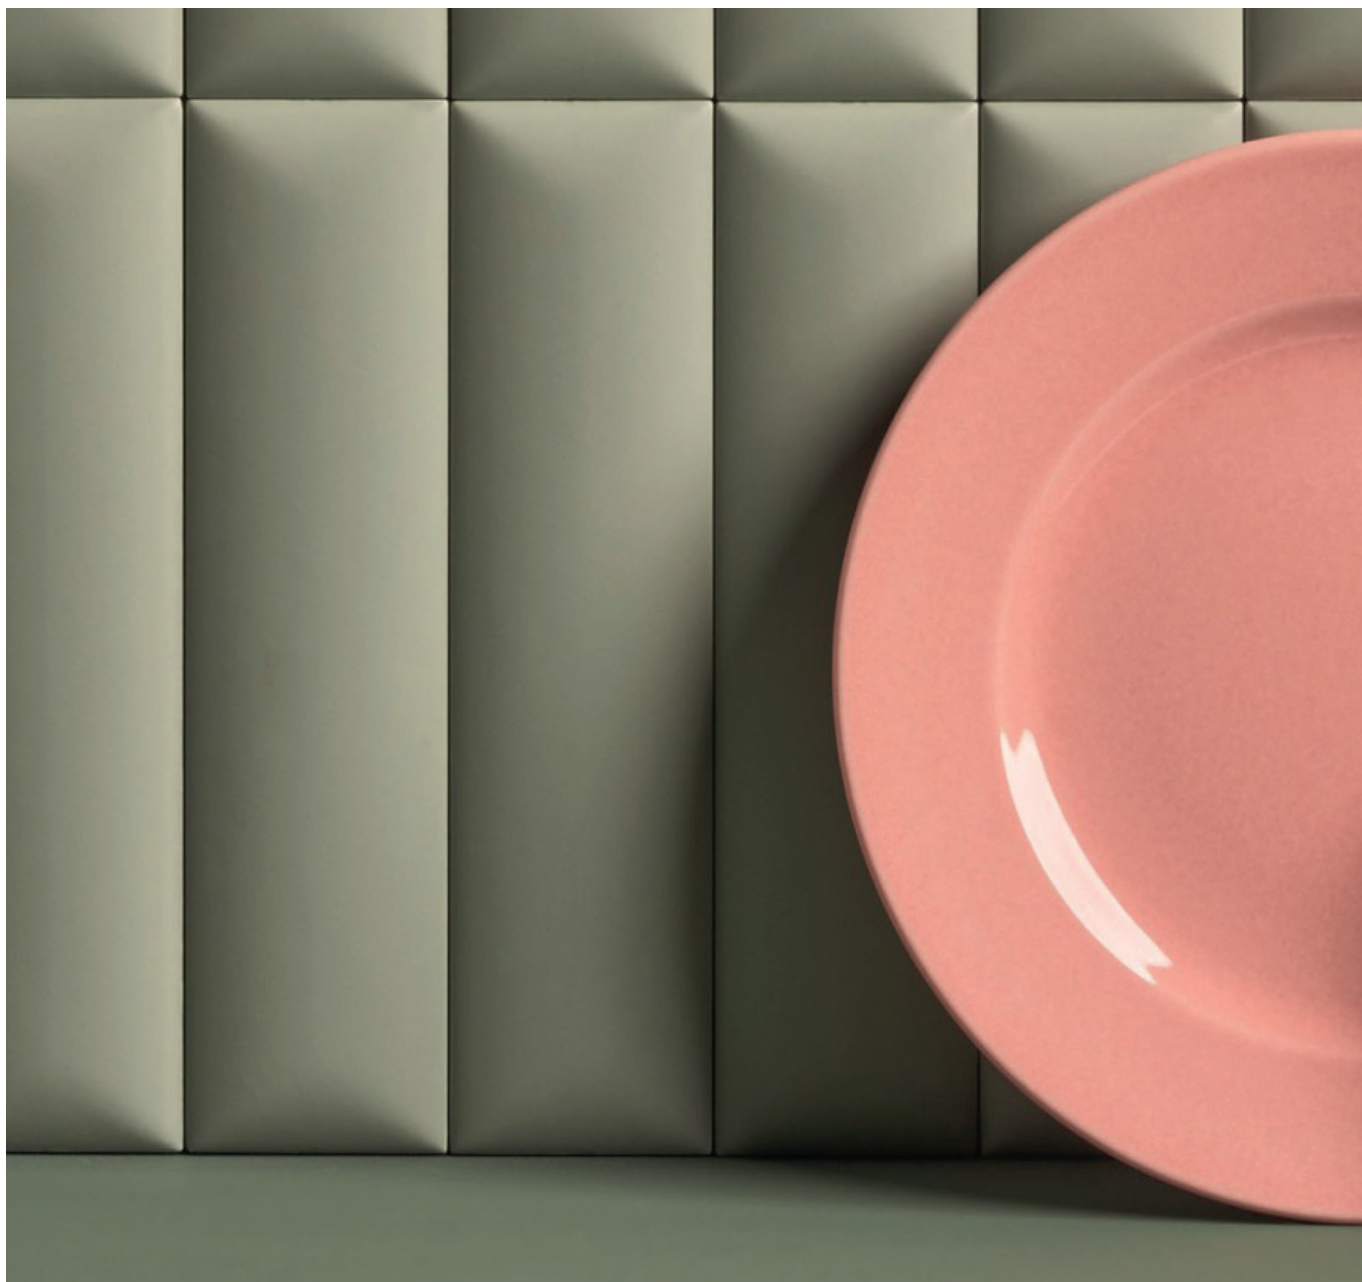

Sedgwick



Sedgwick



PLAIN BIANCO



PLAIN SALVIA



PLAIN NOTTE



PLAIN TERRA



DUNE BIANCO



DUNE SALVIA



DUNE NOTTE



DUNE TERRA



WAVES
BIANCO



WAVES
SALVIA



WAVES
NOTTE



WAVES
TERRA

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles


Sedgwick



STRIP
BIANCO



STRIP SALVIA



STRIP NOTTE



STRIP TERRA



STUD BIANCO



STUD SALVIA



STUD NOTTE



STUD TERRA



PEAK
BIANCO



PEAK
SALVIA



PEAK
NOTTE



PEAK
TERRA

Ceramic	8mm thick	Wall/floor
	Matt	
50x200	✓	Wall



50X200

GROUP / BII - CERAMIC

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.5\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 10\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.3\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 10\%$	Ave $\geq 16\%$
Breaking strength	ISO 10545-4	$\geq 600\text{N}$	$\geq 600\text{N}$
Modulus of rupture	ISO 10545-4	Ave Minimum 12 N/mm ²	Ave min 12 N/mm ²
Thermal shock resistance	ISO 10545-1	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to stain	ISO 10545-14	Min Class 3	4
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles