


Shale

4 COLOURS / 14 SIZES / 3 FINISHES / 0 SPECIAL PIECES

Shale embraces the rocky sediment in its supreme aesthetic expression, when textures and colours, veining and irregularities come together in harmony. So much more than a ceramic collection, Shale is a system of surfaces developed to satisfy all design requirements: façades, flooring, internal and outdoor coverings, high traffic areas, driveways and pool edges. This range has 40% recycled content.

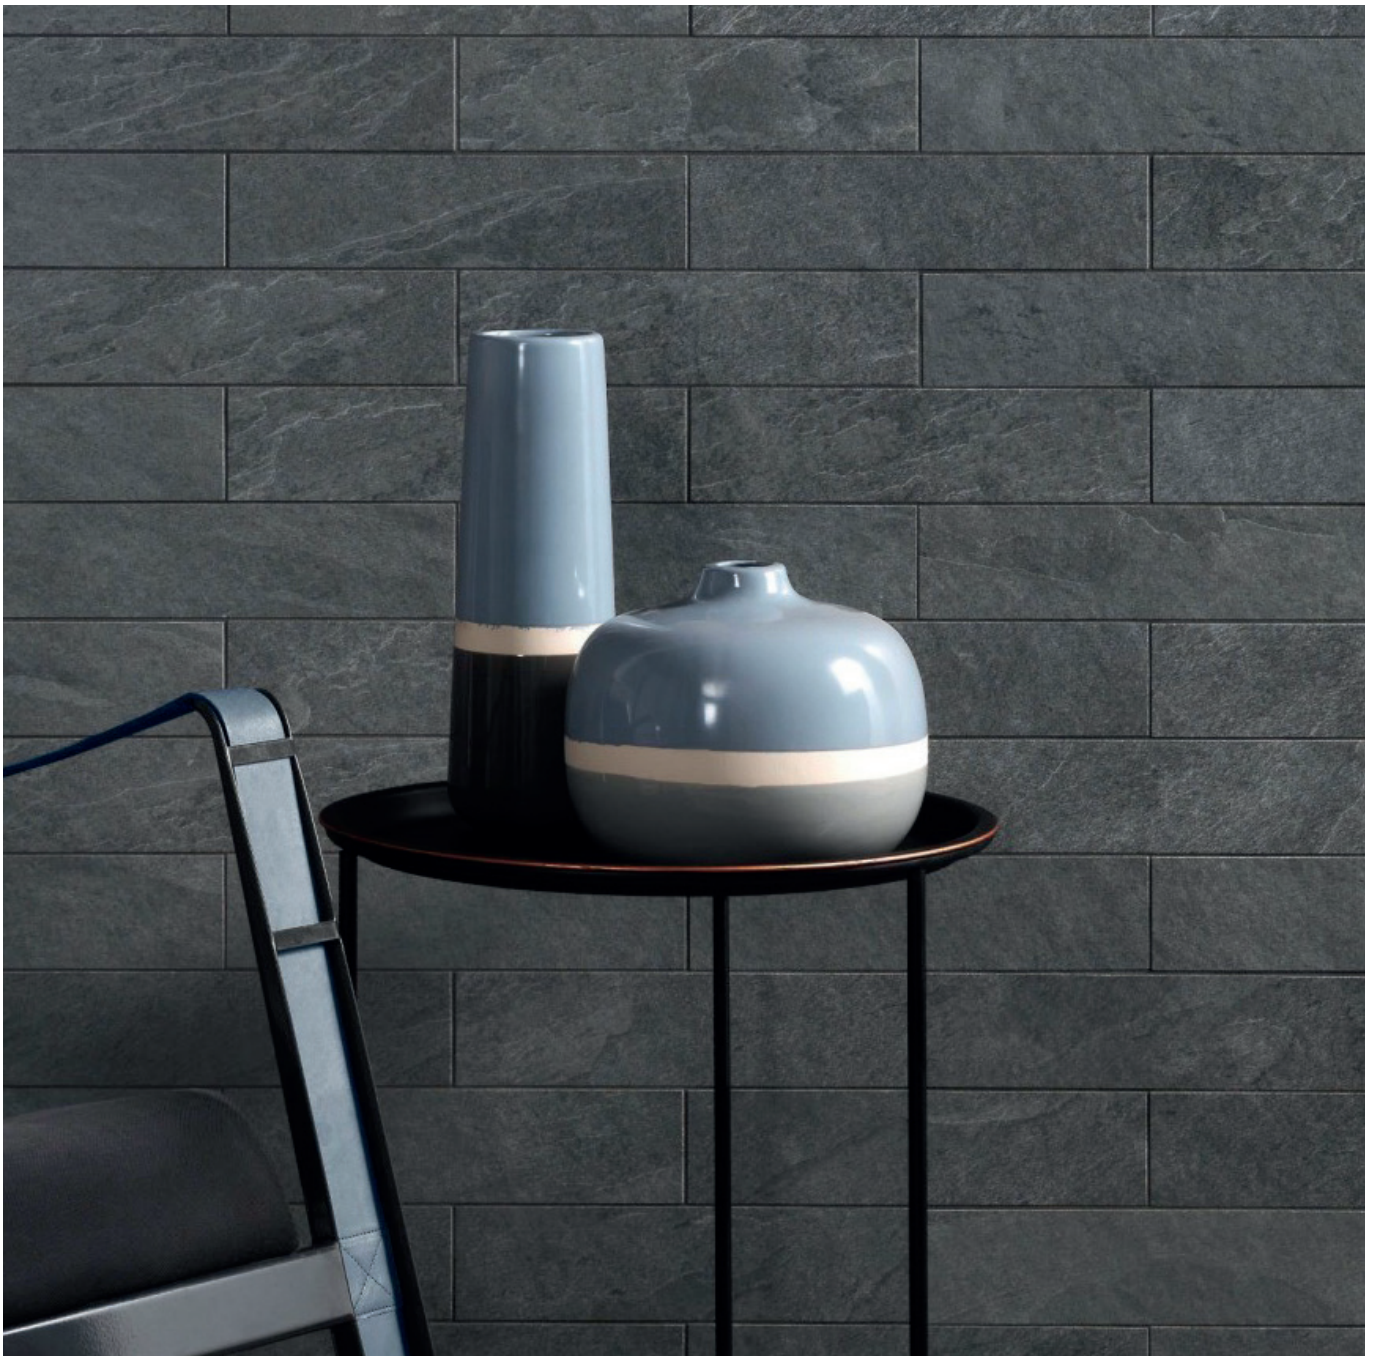

Shale



Shale




Shale




IVORY



SILVER




GREY




DARK




IVORY GRAMMA 72




SILVER GRAMMA 72



GREY GRAMMA 72



DARK GRAMMA 72




IVORY GRAMMA
66SX




SILVER GRAMMA
66SX



GREY GRAMMA
66SX




DARK GRAMMA
66SX




IVORY GRAMMA
66DX




SILVER GRAMMA
66DX



GREY GRAMMA
66DX



DARK GRAMMA
66DX



IVORY GRAMMA
16SX



SILVER GRAMMA
16SX



GREY GRAMMA
16SX



DARK GRAMMA
16SX



IVORY GRAMMA
16DX



SILVER GRAMMA
16DX



GREY GRAMMA
16DX



DARK GRAMMA
16DX

Shale



IVORY MURETTO



SILVER MURETTO



GREY MURETTO



DARK MURETTO



IVORY MURETTO 3D



SILVER MURETTO 3D



GREY MURETTO 3D



DARK MURETTO 3D




IVORY BRICK



SILVER BRICK



GREY BRICK



DARK BRICK



IVORY MOSAICO 36



SILVER MOSAICO 36



GREY MOSAICO 36




DARK MOSAICO 36

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Shale

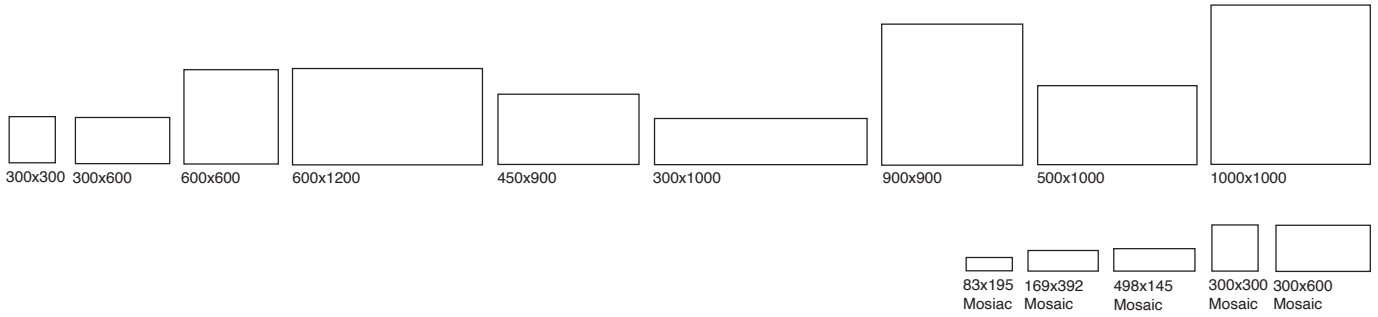

GROUP / Bla PORCELAIN

Range	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	$\leq 0.05\%$
Breaking strength	ISO 10545-4	$\geq 1300N$	Ave min $\geq 2200N$
Modulus of rupture	ISO 10545-4	35 N/mm ² Average min	50 N/mm ² Average min
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	$< 175mm^2$	Ave 145mm ³
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare value	GLA
Resistance to stain	ISO 10545-14	Declare value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Grout and trim available

Shale	Grout	Trim

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles