

# Swerford

4 COLOURS / 8 SIZES / 2 FINISHES / 0 SPECIAL PIECES

Swerford will bring warmth with this antique limestone tile. With four muted colours that are equally at home in a traditional or urban interior. Characterised by chipped edges and a worn look but for a more contemporary look check out the soft finish in blanc in the 6mm thickness in larger slabs in 3200x1600, 1600x1600, 1200x2400. and 1200x1200 20mm outdoor options are available in 600x600 and 400x1200mm in structured finish in Grey and Ecu. This collection has the following recycled content: All 6mm options - 7% 20mm Grey and Ecu - 79.2%



Swerford








# Swerford



BLANC

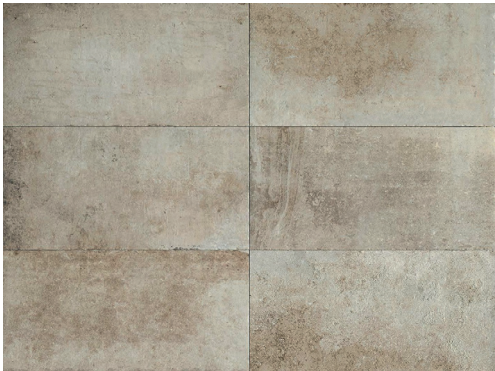

ECRU



GREY




MUD

Sizes available
400x800
400x1200
600x600
600x1200
800x800
1200x1200
1200x2400
1200x2800

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

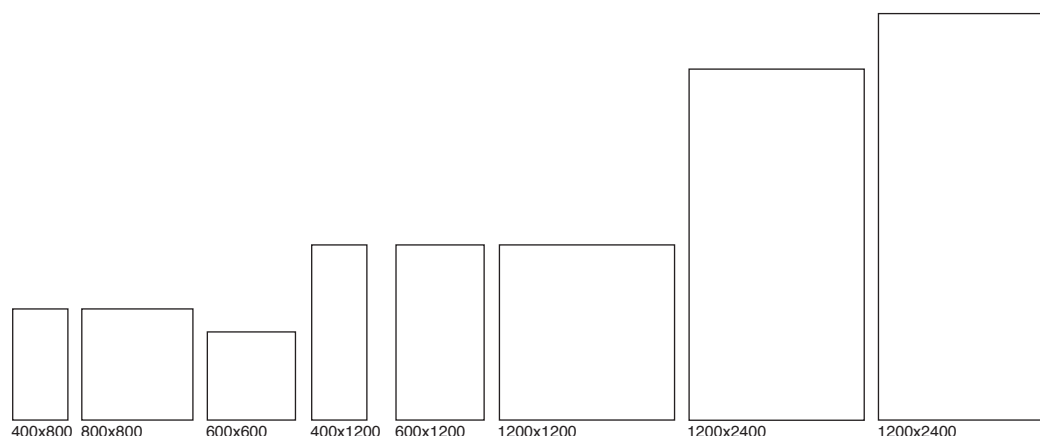

## GROUP / Bla - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave 0.08%
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	Ave 3200N
Modulus of rupture	ISO 10545-4	Ave min 35 N/mm <sup>2</sup>	Ave min 50 N/mm <sup>2</sup>
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	Declare Class	Ave 140mm <sup>2</sup>
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULA
Resistance to stain	ISO 10545-14	Declare Value	Class 3
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
20mm Grey and Ecru	79.2
All 6mm options	7

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles