

Tuva

4 COLOURS / **5** SIZES / **3** FINISHES / **0** SPECIAL PIECES

Tuva is a replica of the tactile beauty of travertine stone in many sizes, colours and design. It's a large and versatile collection that reinterprets a classical material from a fresh, highly contemporary viewpoint. There are four very different designs within this range: Vein Cut – Familiar lengthways vein pattern created by cutting in the vein direction. Minimal – Inspired by the way the underside of the travertine slab is shaped. Ancient – Sophisticated timeworn effect. Ruled – Three dimensional grooves and ruts.



Tuva



Tuva



Tuva



ANCIENT CHOCOLATE
NATURAL



ANCIENT CREAM NATURAL



ANCIENT SILVER NATURAL



ANCIENT WHITE NATURAL



MINIMAL CHOCOLATE
NATURAL



MINIMAL CREAM NATURAL




MINIMAL SILVER NATURAL



MINIMAL WHITE NATURAL



RULED CHOCOLATE
NATURAL



RULED CREAM NATURAL



RULED SILVER NATURAL



RULED WHITE NATURAL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.


For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Tuva



VEIN CHOCOLATE NATURAL



VEIN CREAM NATURAL




VEIN SILVER NATURAL



VEIN WHITE NATURAL



VEIN CHOCOLATE
SEMI-POLISHED



VEIN CREAM
SEMI-POLISHED



VEIN SILVER
SEMI-POLISHED



ANCIENT CREAM TECHNICA




ANCIENT WHITE TECHNICA

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

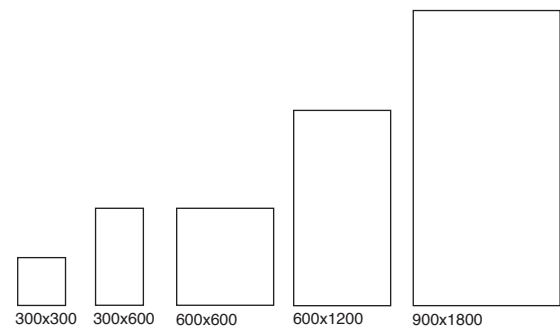

GROUP / Bla PORCELAIN

Range	Standard	Requirement	Typical test value
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	$\leq 0.5\%$
Breaking strength	ISO 10545-4	$\geq 1300N$	9.5 & 10.5mm - Ave $\geq 2000N$, 20mm - 12000N
Modulus of rupture	ISO 10545-4	35 N/mm ² Average min	45 N/mm ² Average
MOHS (Scale of Hardness)	-	Declare rating (1-10)	7 - 8 Natural, 5 - 6 Lappato
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare value	GLA
Resistance to stain	ISO 10545-14	Declare value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles