$\bf 4$ Colours / $\bf 6$ Sizes / $\bf 1$ Finishes / $\bf 0$ Special Pieces

Wickliff is a stylish, stone-effect, porcelain collection which is suitable for both wall and floor. The detailed texture really embraces the natrual stone effect. Available in 2 cold and 2 warm natural hues with a matt finish.









WHITE






CEMENT ANTHRACITE

Porcelain	10mm thick	20mm thick	Wall/floor	Interior/exterior
	Matt	Matt	All tiles	All tiles
100X100	✓		Wall and floor	Interior and exterior
300X600	✓			
450X450	✓			
600X600	✓			
600X1200	✓			
750X750	✓			

^{*20}mm outdoor options available in Anthracite and Cement.

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

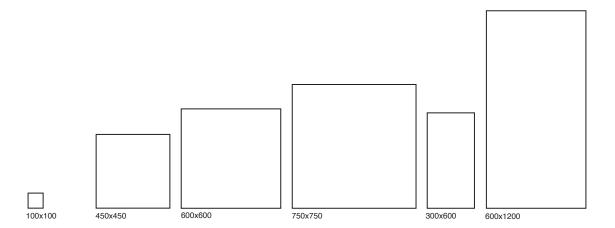

Dimensions	Multiple
Finish	Matt
Body	Porcelain
Wall/floor	Wall and floor
Group	Bi
Pendulum Dry (4S)	+36
Pendulum Wet (4S)	+36
Pendulum Wet (TRL)	Tbc

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

	Standard	Requirement	Typical test value
Length and width	ISO 10545-2	±0.5% ≤ ±2mm	Pass
Thickness	ISO 10545-2	±10% ≤ ±0.5mm	Pass
Straightness	ISO 10545-2	±0.3% ≤ ±1.5mm	Pass
Flatness	ISO 10545-2	±0.5% ≤ ±2.0mm	Pass
Rectangularity	ISO 10545-2	±0.5% ≤ ±2.0mm	Pass
Water absorption	ISO 10545-3	E _b ≤ 0.5%	Pass
Breaking strength	ISO 10545-4	≥ 1300N	Pass
Modulus of rupture	ISO 10545-4	Ave min 35 N/mm²	Pass
Resistance to surface abrasion	ISO 10545-7	n/a	PEI 4
Frost resistance	ISO 10545-12	Complies with standard	Pass
Thermal shock resistance	ISO 10545-9	Complies with standard	Pass
Resistance to stain	ISO 10545-14	Min Class 3	Pass
Resistance to chemicals	ISO 10545-14	Min Class B	Pass
Reaction to fire	-	Class A1 A1/FL	Pass

Slip resistance characteristics	Pendulum Dry (4S Slider 960) +36 PTV	Pendulum Wet (4S Slider 96) +36 PTV
Full range	✓	✓

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.