

Sonyx

3 COLOURS / 8 SIZES / 3 FINISHES / 0 SPECIAL PIECES

Sonyx interprets the surprising elegance of onyx, refined, lustrous and poetic, naturally enriched with inserts of porphyry, a stone material which is more discreet and informal in character. The harmonious pattern sequence that is revealed by placing the large tiles together over large surfaces is a distinguishing trait, as are the fine surface finishes; gloss, satin or structured.



Sonyx



Sonyx



Sonyx



WHITE ONYX



WHITE BLEND



WHITE PORPHYRY
STRUCTURED



SILVER ONYX



SILVER BLEND




SILVER PORPHYRY
STRUCTURED



GOLDEN ONYX



GOLDEN BLEND




GOLDEN PORPHYRY
STRUCTURED

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

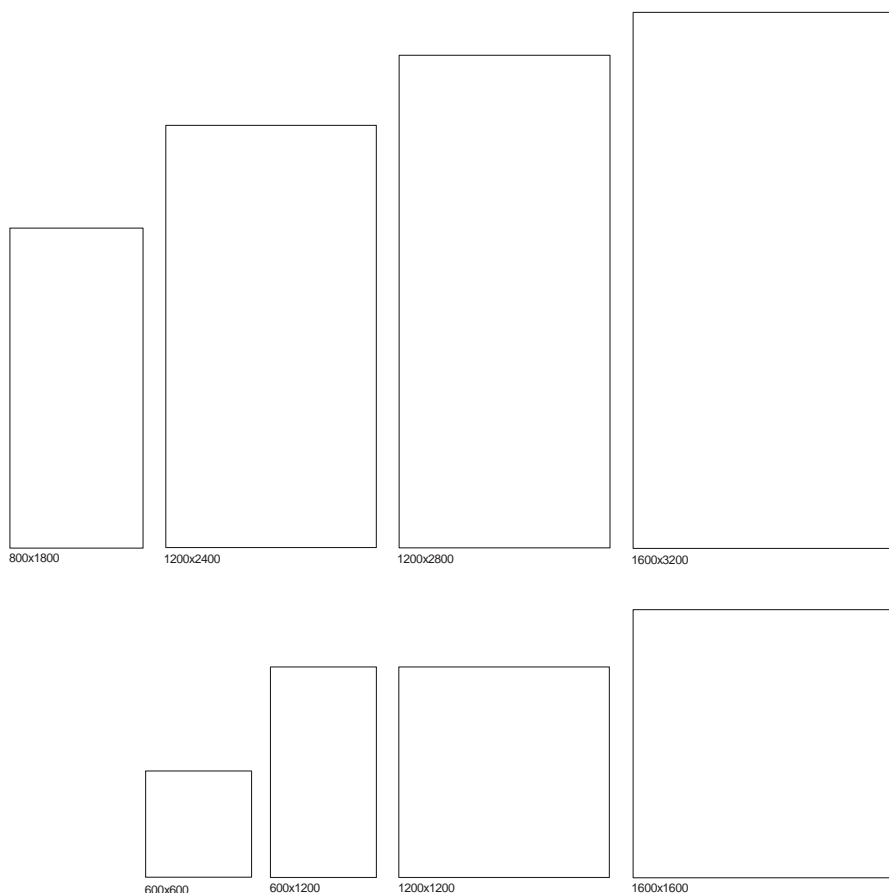

Porcelain	10mm thick			6mm thick			Wall/floor	Interior/exterior
	Matt	Gloss	Structured	Satin	Gloss	Structured	All tiles	All tiles
800X1800	✓	✓	✓				Wall and floor	Interior
600X1200	✓	✓	✓				Wall and floor	Interior
600X600	✓	✓	✓				Wall and floor	Interior
1200X2400				✓	✓	✓	Wall and floor	Interior
1600X3200				✓	✓		Wall and floor	Interior
1200X2800				✓	✓		Wall and floor	Interior
1600X1600				✓	✓		Wall and floor	Interior
1200X1200				✓	✓	✓	Wall and floor	Interior
600X1200				✓	✓	✓	Wall and floor	Interior
800x800				✓	✓		Wall and floor	Interior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

GROUP / Bla - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.08\%$
Breaking strength	ISO 10545-4	$\geq 1300N$	10mm - Ave 3200N 6mm - Ave 1350N
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	10mm - Ave 50 N/mm ² 6mm - Ave 52 N/mm ²
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	<175mm ²	Ave 140mm ³
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	NPD
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULB
Resistance to stain	ISO 10545-14	Declare Value	Class 4
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
All items	7.1

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk