

Trieste

12 COLOURS / 1 SIZES / 2 FINISHES / 0 SPECIAL PIECES


The Trieste collection is a penny round collection of mosaics. Made of glazed porcelain, the chips have a diameter of 19mm and a thickness of 5.5mm. Most of these tiles have a glossy finish, but there are also some matt variants available. Trieste mosaics make a fun and playful alternative to standard tile shapes, like squared or hexagon. They are available in 12 colours, ranging from bright red and orange to trendy pastel shades. Some colours feature a printed, more defined edge around the chips giving the tile more depth and character.




Trieste




Trieste

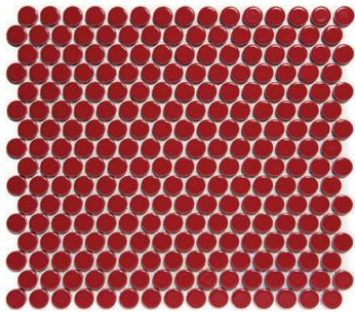


RED GLOSS

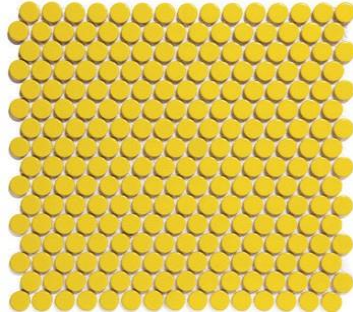


YELLOW GLOSS

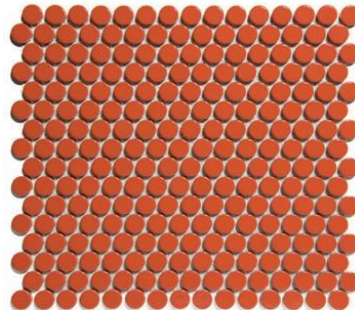


ORANGE GLOSS

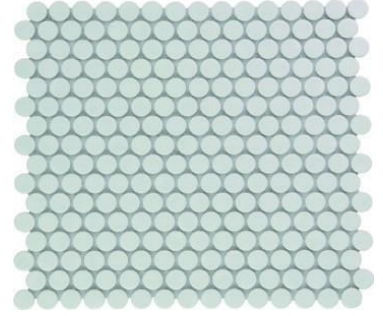


EXTRA WHITE GLOSS

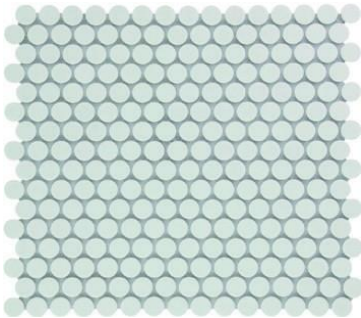


WHITE MATT

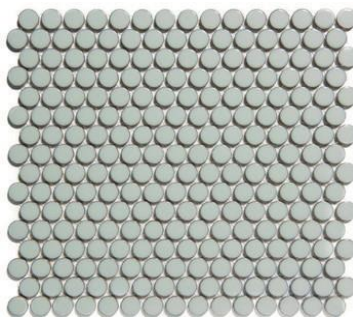


LIGHT GREY GLOSS EDGE

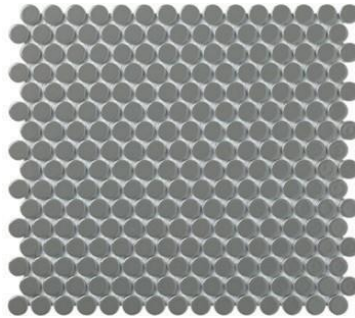


DARK GREY GLOSS

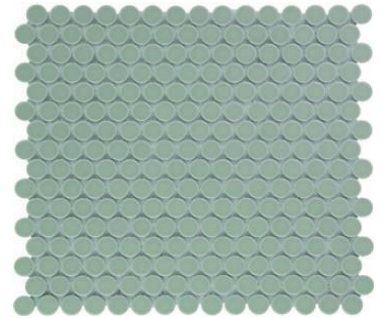


BLUE GREY GLOSS

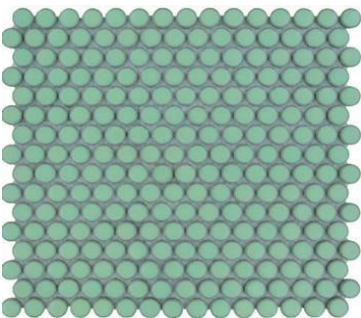


LIGHT GREEN GLOSS

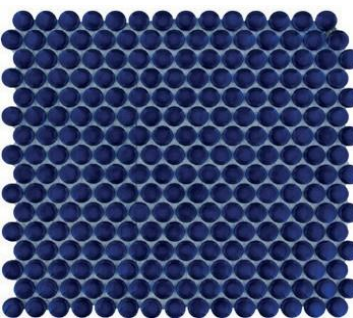

COBALT BLUE GLOSS

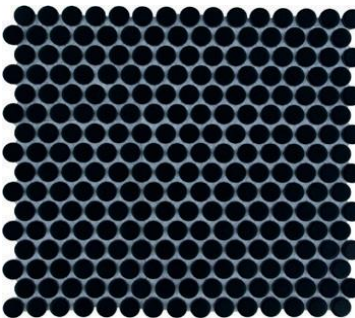

BLACK GLOSS

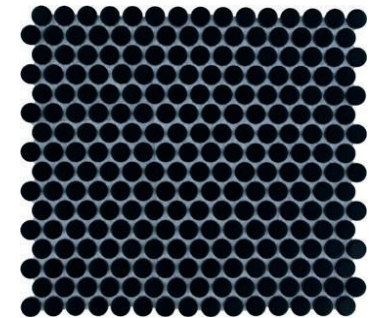

BLACK MATT

Porcelain	5.5mm thick	Wall/floor	Interior/exterior
	Matt	All tiles	All tiles
294x315 sheet	✓	Wall only	Interior only

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Trieste

GROUP / Bla - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave $\leq 0.09\%$
Breaking strength	ISO 10545-4	$\geq 1300N$	NPD
Modulus of rupture	ISO 10545-4	Ave min 35 N/mm ²	NPD
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to stain	ISO 10545-14	Declare Value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
Trieste	

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles