

Perryn

6 COLOURS / 1 SIZE / 1 FINISH / 0 SPECIAL PIECES


With its slightly rippled surface and rustic edges, Perryn is a timeless classic which adds a touch of luxury to any space. In the popular size of 7.5x30cm, Perryn has 6 colour ways all of which were inspired by nature.



Perryn



Perryn

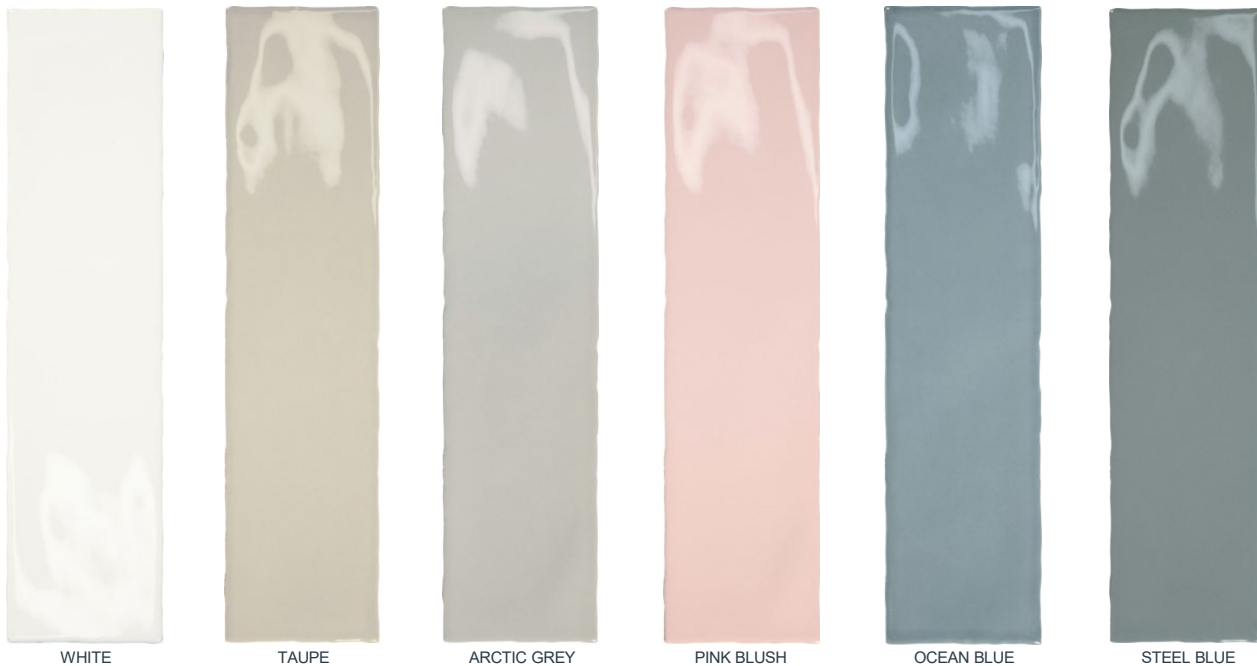

WHITE

TAUPE

ARCTIC GREY

PINK BLUSH

OCEAN BLUE

STEEL BLUE

White body ceramic	8.4mm thick	Wall/floor	Interior/exterior
	All tiles	All tiles	All tiles
75x300	Gloss	Wall	Interior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

PERRYN

GROUP / BIII - CERAMIC

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.5% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b > 10\%$	Ave >15.2%
Breaking strength	ISO 10545-4	≥ 600N	≥600N
Modulus of rupture	ISO 10545-4	Ave Minimum 12 N/mm ²	Ave min 23 N/mm ²
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to stain	ISO 10545-14	Min Class 3	Class 5
Reaction to fire	-	Class A1 A1/FL	A1

Recycled content	%
Perryn	25

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles