

# Kilburn

4 COLOURS / 1 SIZE / 1 FINISH / 0 SPECIAL PIECES

Kilburn is a brick style range which offers a stone effect finish in grey and ivory, and a terrazzo effect finish in black and terracotta. With a different take on the standard brick effect, Kilburn provides a warm and rustic feel to any space.




Kilburn




Kilburn



# Kilburn

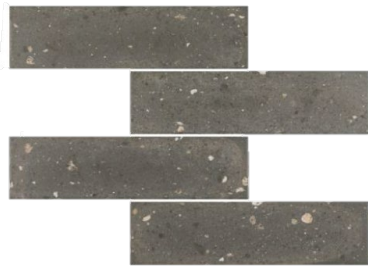

CHARCOAL TERRAZZO

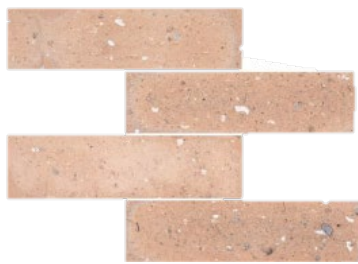

COTTO TERRACOTTI



CHARCOAL TERRAZZO



SILVER STONE



70x260x6.5

Ceramic	6.5mm thick	Wall/floor	Interior/exterior
	All tiles	All tiles	All tiles
70x260	Matt	Wall Only	Interior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Kilburn

## GROUP / BIIa- CERAMIC

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6%	Conforms
Thickness	ISO 10545-2	±5%	Conforms
Straightness	ISO 10545-2	±0.5%	Conforms
Flatness	ISO 10545-2	±0.5%	Conforms
Rectangularity	ISO 10545-2	±0.5%	Conforms
Water absorption	ISO 10545-3	$E_b >3\% \leq 6\%$	Ave < 6%
Breaking strength	ISO 10545-4	≥ 600N	≥ 600N
Modulus of rupture	ISO 10545-4	Ave Minimum 22 N/mm <sup>2</sup>	Ave min 22 N/mm <sup>2</sup>
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to stain	ISO 10545-14	Min Class 3	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
Kilburn	7.5

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles