

Solids

9 COLOURS / 4 SIZES / 3 FINISHES / 0 SPECIAL PIECES

Solids is the concept of Matt stone materialized in porcelain stoneware. Available in matt, polished and anti-slip finishings, Solids offers a complete range of solutions for the demanding requirements of modern architecture, being the ideal solution both for wall and floor coverings in residential and public spaces.




Solids





Solids

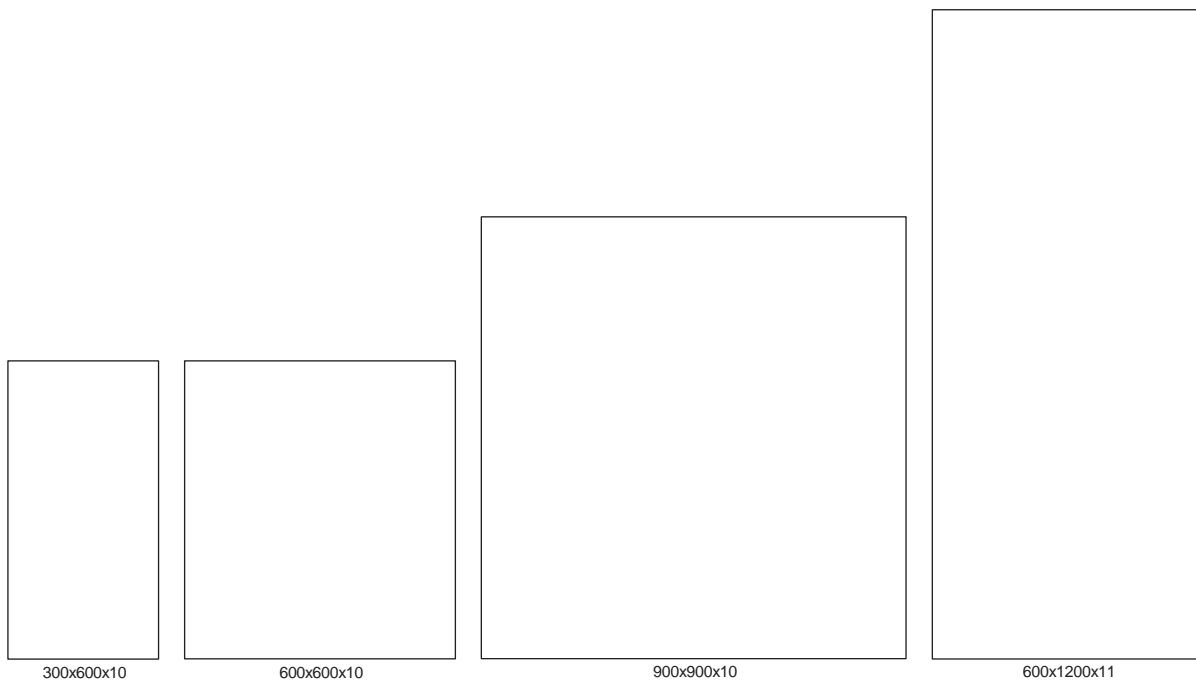

Porcelain	10mm thick	11mm thick	Wall/floor	Interior/exterior
	All tiles	All tiles	All tiles	All tiles
300x600	Matt, Polished, Grip		Wall & Floor	Interior & Exterior
600x600	Matt, Polished, Grip		Wall & Floor	Interior & Exterior
900x900	Matt, Polished		Wall & Floor	Interior & Exterior
600x1200	Matt, Polished		Wall & Floor	Interior & Exterior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Solids

GROUP / BLa - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave $\leq 0.3\%$
Breaking strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	Ave 45 N/mm ²
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	$\leq 175mm^2$	Ave 120mm ²
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULA
Resistance to stain	ISO 10545-14	Declare Value	Class 4
Reaction to fire		Class A1 A1/FL	A1 A1/FL

Slip resistance characteristics	Pendulum Dry (4S Slider 96) +36 PTV	Pendulum Wet (4S Slider 96) +36 PTV
AS Finish Only	✓	✓

Recycled content	%
Solids	0

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles