

# Milan

6 DESIGNS / 6 SIZES / 3 FINISHES / 5 SPECIAL PIECES

Milan is a porcelain collection with a strong design attitude: divided into 3 complementary technologies, it offers 3 shades for each of the two graphic interpretations, sizes ranging from 30x60 to 120x278cm with a rich set of decorations.



Milan




Milan




# Milan



HIDDEN LIGHT

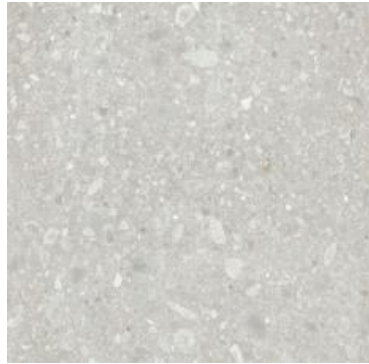


CLUSTER LIGHT

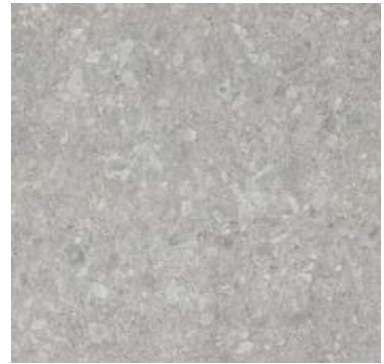


HIDDEN MID



CLUSTER MID

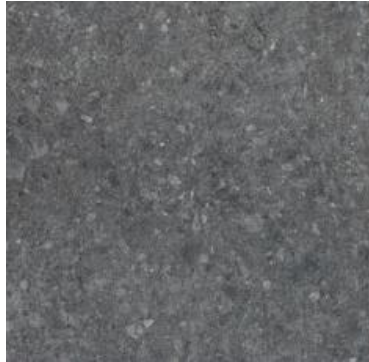


HIDDEN DARK

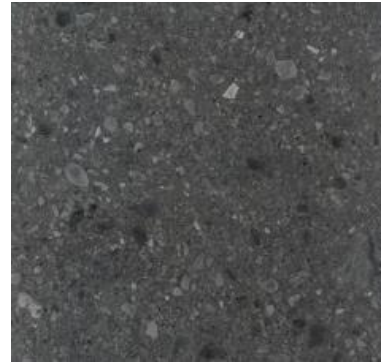


CLUSTER DARK



300x600x9




600x600x9




600x1200x9



600x1200x20



1200x1200x9



1200x2780x6

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Milan

Porcelain	6mm thick	9mm thick		20mm thick	Wall/floor	Interior/exterior
	Natural	Natural	Grip	Grip L2	All tiles	All tiles
300x600		✓			Wall & Floor	Interior Only
600x600		✓	✓		Wall & Floor	Interior & Exterior options
600x1200		✓	✓	✓	Wall & Floor	Interior Only
1200x1200		✓			Wall & Floor	Interior Only
1200x2780	✓				Wall & Floor	Interior Only
145x498 Gramma 72		✓			Wall & Floor	Interior Only
300x300 Mosaics		✓			Wall & Floor	Interior Only

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_b \leq 0.5\%$	$E_b \leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	50 N/mm <sup>2</sup>
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULA
Resistance to Stain	ISO 10545-14	Declare Value	Conforms
Reaction to Fire		Class A1 A1/FL	Class A1 A1/FL

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles