

# Venice

5 COLOURS / 6 SIZES / 2 FINISHES / SPECIAL PIECES

Venice celebrates the beauty of onyx; it's intriguing translucent quality, the rich, contrasting transparent layers and the infinite shifts in tone.

Available sizes: 120x278, 120x120, 90x180, 90x90, 60x120, 30x60 plus mosaics, skirting and step pieces

Available finishes: Lappato and Silktech (PTV+36)



Venice



Venice



# Venice



IVORY




PINK




GREEN



BLUE

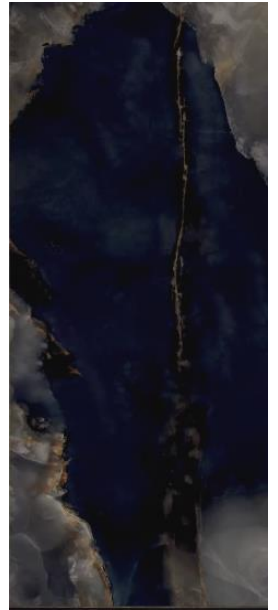

BLACK



Mosaics available in all colours

Porcelain	6mm thick	9.5mm thick	9.5mm thick	10mm thick	Wall/floor	Interior/exterior
	Lappato	Lappato	Silktech	Silktech	All tiles	All tiles
1200x2780	✓				Wall & Floor	Interior Only
1200x1200		✓			Wall & Floor	Interior Only
900x1800				✓	Wall & Floor	Interior Only
900x900		✓			Wall & Floor	Interior Only
600x1200		✓	✓		Wall & Floor	Interior Only
300x600		✓	✓		Wall & Floor	Interior Only
300x300 mosaics		✓	✓		Wall & Floor	Interior Only

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Venice

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_b \leq 0.5\%$	$E_b \leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 2000N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	Ave Minimum 45 N/mm <sup>2</sup>
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULA
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1 A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Lappato	✓	✗
Silktech	✓	✓

Recycled Content	0 %
Range Name	Venice

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles