

Keeper

7 COLOURS / 4 SIZES / 1 FINISH / 4 SPECIAL PIECES

With a fine texture, soft tones and delicate mix, Keeper is a sophisticated and modern fabric effect tile range which has a versatile design to suit any space.

Available in 20x20, 30x60, 60x60 and 90x90 as standard, there are also decorative patterns and mosaics to complement the range.



Keeper



Keeper



Keeper

Ecru



Sand



White



Pearl



Grey



Décor Light




Décor Dark



Mix Light Hexagon Mosaic



Mix Dark Hexagon Mosaic

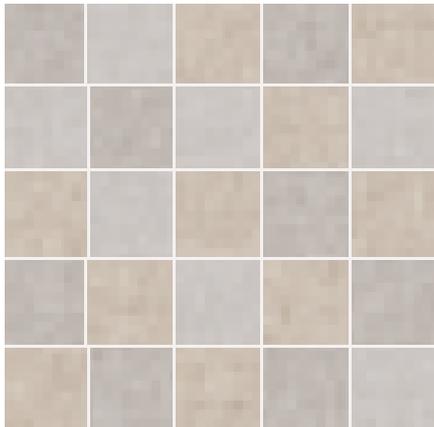

Mix Light Mosaic



Mix Dark Mosaic




Patchwork

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Keeper

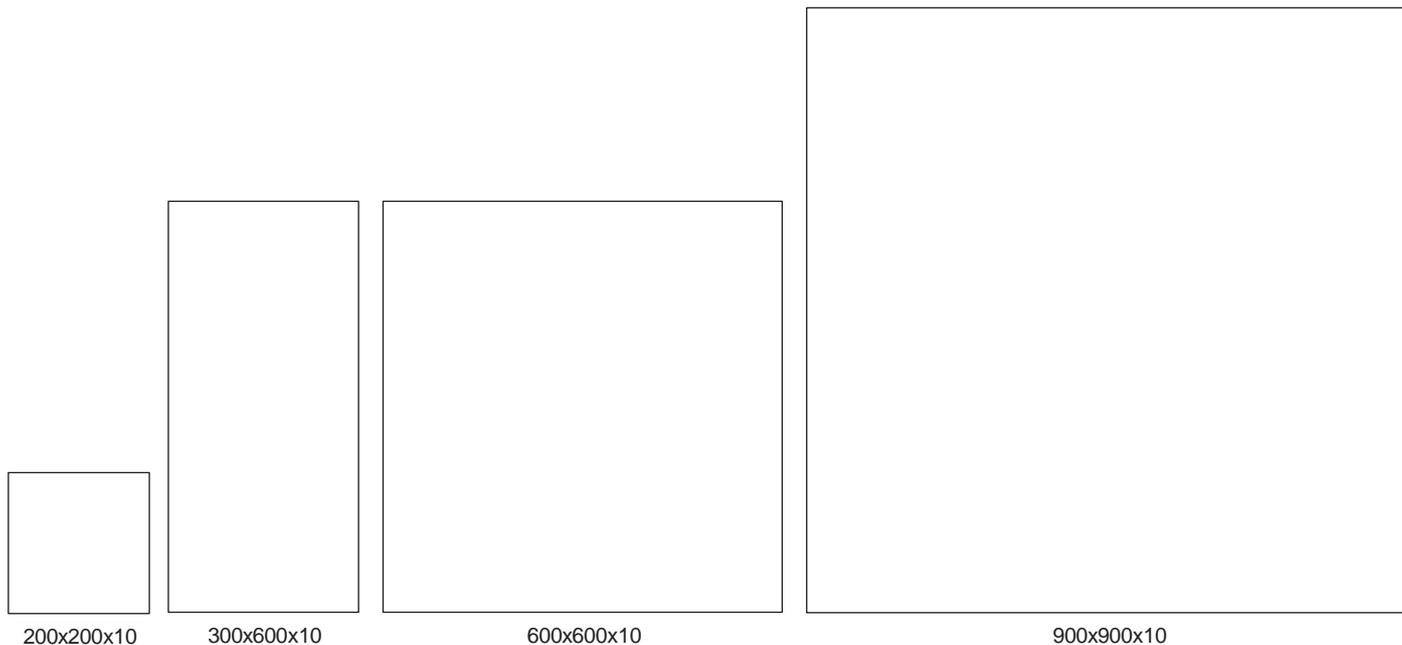

Porcelain	10mm thick	Wall/floor	Interior/exterior
	Matt	All tiles	All tiles
200x200	✓	Wall & Floor	Interior & Exterior
300x600	✓	Wall & Floor	Interior & Exterior
600x600	✓	Wall & Floor	Interior & Exterior
900x900	✓	Wall & Floor	Interior & Exterior
300x300 Mosaic	✓	Wall & Floor	Interior & Exterior
200x460 Hex Mosaic	✓	Wall & Floor	Interior & Exterior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Keeper

GROUP / BLa - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$E_w \leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	$\geq 45N/mm^2$
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Declare Value	Class 3
Reaction to Fire		Class A1 A1/FL	Class A1 A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
	Full Range	✓

Recycled Content	20 %
Range Name	Keeper

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles