

# TECHNICAL INFO

CREATING  
*people* PLACES



**everscape**

OUTDOOR PORCELAIN

**YOUR SPACE.  
YOUR WAY.**

Everscape™ is a range of specialised 2cm deep outdoor tiles with an amalgamation of 'FOREVER' and 'LANDSCAPE' embodied in its spirit.

This combination of elegant, simple design married with innovative technology allows you to make a real improvement to your outdoor space for years to come.

**Extend your style outside and love your garden all year round!**

**ESCAPE  
AND  
ENJOY**

From sun drenched patios and secret courtyard gardens to cosy city balconies and breezy beachfront terraces, our exclusive range of outdoor tiles will help transform every corner of your home into spaces you'll never want to leave; creating the perfect space for endless summers.

## **PORCELAIN**

Porcelain is stain, fire and frost resistant, meaning little upkeep is needed, and with multiple ways to fit Everscape™, its an easy DIY solution for the budding landscape designer in all of us.

The 2cm depth coupled with the slip resistant surface provides ultimate durability for your outdoor space.

**RESILIENT  
YET ELEGANT**

## **Everscape™ vs Traditional Slabs**

Everscape™ offers a clean-cut edge for uniformity, and unlike traditional paving slabs, Everscape™ features a hardwearing finish available in a choice of colours and designs which are resistant to fading and staining.

This makes Everscape™ quick and easy to clean.

For that summer refresh, all you need is a power washer and a suitable outdoor cleaner such as FILA Outdoor Patio and Porcelain Cleaner.



# EVERSCAPE™ - ENIS



Porcelain



2cm  
Thickness



High Slip  
Resistance



Features  
Variation




Stain  
Resistant



Suitable For  
Outdoor

The Enis range mixes the classic texture of slate with a modern colour palette to revamp any outdoor space. The rustic nature of the slate effect pairs perfectly with soft greenery and slow-moving water.

## AVAILABILITY



59.8 x 59.8cm




2.83  
Tiles Per M<sup>2</sup>



2 Tiles  
Per Box



0.71M<sup>2</sup>  
Per Box

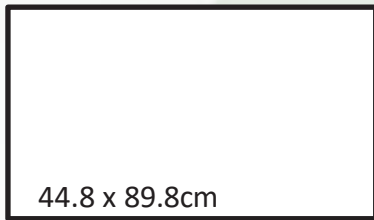

44.8 x 89.8cm



2.49  
Tiles Per M<sup>2</sup>



2 Tile  
Per Box




0.81M<sup>2</sup>  
Per Box

## COLOURS



GREY



BLACK



IVORY

Capture the natural element inside too with the coordinating 1cm indoor tile.

**MATCHING  
INDOOR TILE  
AVAILABLE**



# Everscape Enis

## GROUP / BLa - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	> 35 N/mm <sup>2</sup>
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare Value	NPD
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✓

Recycled Content	5 %
Range Name	Everscape Enis

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# EVERSCAPE™ - VALLETTA



Porcelain



2cm  
Thickness




High Slip  
Resistance



Features  
Variation



Stain  
Resistant




Suitable For  
Outdoor

The Valletta range is available in two contemporary colours that expertly mimic natural stone. The variety of sizes allows you to fill your space in a laying pattern of your choosing and with a multitude of fixing options, you can put your patio anywhere in the garden.

## COLOURS




BEIGE



GREY

## AVAILABILITY

59.2 x 59.2cm



0.71M<sup>2</sup>  
Per Box



2 Tiles  
Per Box



2.83  
Tiles Per M<sup>2</sup>

MIMICS  
NATURAL  
STONE



# Everscape Valletta

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	35 N/mm <sup>2</sup>
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare Value	Class 3
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✓

Recycled Content	0 %
Range Name	Everscape Valletta

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles



**SEACOAST  
LANDSCAPE**

# EVERSCAPE™ - HOMESTONE




Porcelain



2cm  
Thickness



High Slip  
Resistance



Suitable For  
Outdoor



Features  
Variation




Stain  
Resistant

The Homestone range is available in 2 natural colourways that expertly replicate natural stone and are inspired by the landscape of the seacoast. More hardwearing and durable than natural stone, this porcelain tile has a finish which is resistant to fading and staining.

## COLOURS




**PEBBLE**



**SAND**

## AVAILABILITY

59.2 x 59.2cm



2.83  
Tiles Per M<sup>2</sup>



2 Tiles  
Per Box



0.71M<sup>2</sup>  
Per Box



# Everscape Homestone

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	35 N/mm <sup>2</sup>
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare Value	PEI IV
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Declare Value	Class 3
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✓

Recycled Content	0 %
Range Name	Everscape Homestone

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles



# EVERSCAPE™ - KEMBLE



Porcelain



2cm  
Thickness



High Slip  
Resistance



Suitable For  
Outdoor



Features  
Variation



Stain  
Resistant

Create a modern yet timeless aesthetic with the Kemble tile.

Kemble is a soft limestone effect with minimal patterning that mimics natural stone and is available in three warm shades.

## COLOURS



SAND




IVORY



GREY

## AVAILABILITY



59.7 x 59.7cm




2.83  
Tiles Per M<sup>2</sup>



2 Tiles  
Per Box



0.71M<sup>2</sup>  
Per Box

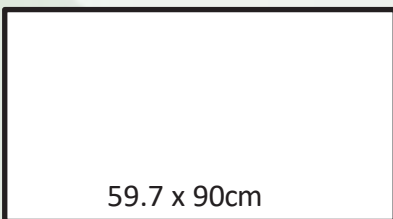

59.7 x 90cm



2.83  
Tiles Per M<sup>2</sup>



2 Tiles  
Per Box



0.71M<sup>2</sup>  
Per Box

For a seamless transition indoors, carry on tiling your living space in Kemble with the 1cm indoor version of the same range.

**MATCHING  
INDOOR TILE  
AVAILABLE**



# Everscape Kemble

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	35 N/mm <sup>2</sup>
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✓

Recycled Content	5 %
Range Name	Everscape Kemble

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# EVERSCAPE™ - MARBEX



Porcelain



2cm  
Thickness



High Slip  
Resistance



Suitable For  
Outdoor



Features  
Variation



Stain  
Resistant


A marble effect tile like Marbex allows you to recreate the intricate opulence of marble with the added practicalities of a vitrified porcelain tile.

Combined with its matt finish, Marbex is ideal for outdoor weather conditions that would normally discolour real white marble. With no sealing or specialist cleaning required, it's much easier to maintain than the real stone.

## COLOURS



## AVAILABILITY



59.2 x 59.2cm



2.83  
Tiles Per M<sup>2</sup>



0.71M<sup>2</sup>  
Per Box



2 Tiles  
Per Box

MARBLE  
EFFECT



# Everscape Marbex

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	> 35 N/mm <sup>2</sup>
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare Value	PEI IV
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Declare Value	Class 3
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✓

Recycled Content	0 %
Range Name	Everscape Marbex

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# EVERSCAPE™ - RIVEN



Porcelain



2cm  
Thickness



Suitable For  
Outdoor



High Slip  
Resistance



Stain  
Resistant



Features  
Variation



MIMICS  
NATURAL  
STONE

Introduce this Riven grey stone effect paving into your garden for a luxury feel whilst on a budget.

The Riven range brings together modernity and safety with its slip resistant finish and resistance to fading and staining.



0.71M<sup>2</sup>  
Per Box




2 Tiles  
Per Box



2.83  
Tiles Per M<sup>2</sup>

59.2 x 59.2cm

## AVAILABILITY



## COLOURS



GRAPHITE



GREY

# Everscape Riven

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	> 35 N/mm <sup>2</sup>
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare Value	Class 2
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Declare Value	Class 3
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✓

Recycled Content	0 %
Range Name	Everscape Riven

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# EVERSCAPE™ - SANDSTONE



Porcelain



2cm  
Thickness



Suitable For  
Outdoor



Stain  
Resistant



Features  
Variation



High Slip  
Resistance

The sandstone effect range is available in traditional beige but also a contemporary grey that really highlights the unique markings of the natural stone, expertly replicated on vitrified porcelain.

This hardy base makes the Everscape™ range durable and stain resistant.

Coupled with its slip resistance and hard wearing finish, Everscape™ Sandstone is an ideal choice for your patio.

## COLOURS




BEIGE



GREY

MIMICS  
NATURAL  
STONE

## AVAILABILITY



59.5 x 59.5cm



2.83  
Tiles Per M<sup>2</sup>



0.72M<sup>2</sup>  
Per Box



2 Tiles  
Per Box



# Everscape Sandstone

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	35 N/mm <sup>2</sup>
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare Value	Class 3
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✓

Recycled Content	0 %
Range Name	Everscape Sandstone

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles



## EVERSCAPE™ - PLANKS




WOOD  
EFFECT



2cm  
Thickness



Porcelain



Suitable For  
Outdoor



Features  
Variation



Stain  
Resistant



High Slip  
Resistance

The Everscape™ planks wood effect range, available in Oak and Grey, offers an easy maintenance solution to decking.

Traditional wooden decking needs to be maintained over the years with consistent staining and will eventually rot away, not only this, but it can become very slippery in wet weather conditions.

The vitrified porcelain of Everscape™ is hardwearing and resistant to staining, plus the laser printed finish prevents colour fading in direct sunlight; coupled with a high slip resistance makes Everscape™ Planks the perfect upgrade to regular garden decking.

## COLOURS



GREY



OAK

## AVAILABILITY




0.35M<sup>2</sup>  
Per Box



1 Tile  
Per Box



2.82  
Tiles Per M<sup>2</sup>

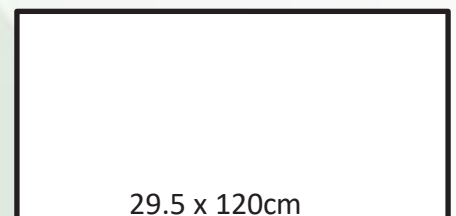

29.5 x 120cm

# Everscape Planks

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	0.5%
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	35 N/mm <sup>2</sup>
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Declare Value	Class 3
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✓

Recycled Content	0 %
Range Name	Everscape Planks

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# EVERSCAPE™ - GRANITE

Create a natural feeling granite finish to your outdoor pathway or patio with the knowledge that this porcelain tile is harder and more durable than natural stone.



Porcelain



2cm  
Thickness



Suitable For  
Outdoor



Features  
Variation



High Slip  
Resistance



Stain  
Resistant

## COLOURS



GREY




WHITE



MIMICS  
NATURAL  
STONE

## AVAILABILITY

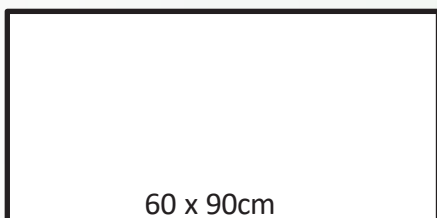

1.85  
Tiles Per M<sup>2</sup>



0.54M<sup>2</sup>  
Per Box



1 Tile  
Per Box

# Everscape Granite

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	35 N/mm <sup>2</sup>
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Declare Value	Class 3
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✓

Recycled Content	0 %
Range Name	Everscape Granite

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# EVERSCAPE™ - CEMENTO



2cm  
Thickness



Porcelain



Suitable For  
Outdoor



Features  
Variation



Stain  
Resistant




High Slip  
Resistance

Introduce this concrete effect porcelain paving into your garden for a luxury feel whilst on a budget.

The Cemento range brings together modernity and safety with its slip resistant finish and resistance to fading and staining.

## AVAILABILITY



60 x 60cm



2.83  
Tiles Per M<sup>2</sup>



0.72M<sup>2</sup>  
Per Box



2 Tiles  
Per Box

## COLOURS



GREY



TAUPE



# Everscape Cemento

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	≤0.5%
Breaking Strength	ISO 10545-4	≥ 1300N	≥ 1300N
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	35 N/mm <sup>2</sup>
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare Value	Class 3
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Declare Value	Class 3
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✓

Recycled Content	0 %
Range Name	Everscape Cemento

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# EVERSCAPE™ - MARBSTONE & EARTHSTONE

Bring the look of natural stone to your outdoor space with our extra large porcelain Everscape™ Marbstone or Everscape™ Earthstone range.



Porcelain



2cm  
Thickness



Suitable For  
Outdoor



Features  
Variation




High Slip  
Resistance




Stain  
Resistant

## COLOURS




**MARBSTONE**



**EARTHSTONE**

## AVAILABILITY

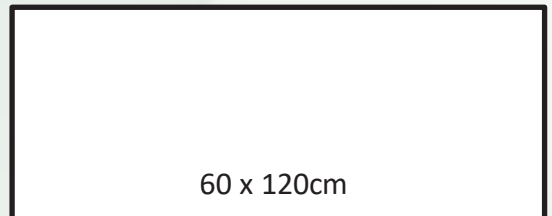

60 x 120cm



0.72M<sup>2</sup>  
Per Box



1 Tile  
Per Box



1.39  
Tiles Per M<sup>2</sup>



# Everscape Marbstone & Earthstone

## GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	35 N/mm <sup>2</sup>
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare Value	Class 3
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Declare Value	Class 3
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✓

Recycled Content	0 %
Range Name	Everscape Marbstone & Earthstone

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles



## EVERSCAPE™ - INTERLOCK

Utilising the technology and expertise made to create natural split face tiles, these Everscape™ porcelain tiles are calibrated to different thicknesses to perfectly emulate the beauty of true split face.

Available in four colourways, they coordinate with other tiles in the Everscape™ range to create a seamless and decorative finish to your outdoor space.

These interlocking porcelain wall tiles can also be used indoors for a rustic finish.



Porcelain



1.5 - 2cm  
Thickness



Suitable For  
Outdoor



Features  
Variation



Stain  
Resistant



Wall Only

## COLOURS



EARTHSTONE BEIGE



GRANITE GREY



GRANITE WHITE



MARBSTONE GREY

Please note that due to the size and thickness of Everscape™ Interlock tiles, these exceed the load bearing weight of plaster and plasterboard substrates.

## AVAILABILITY

15 x 60cm



6 Tiles  
Per Box



11.11  
Tiles Per M<sup>2</sup>

# Everscape Interlock

## GROUP / BLa - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	≤0.5%
Breaking Strength	ISO 10545-4	≥ 1300N	≥ 1300N
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	35 N/mm <sup>2</sup>
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare Value	Class 3
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Declare Value	Class 3
Reaction to Fire		Class A1 A1/FL	Class A1

Recycled Content	0 %
Range Name	Everscape Interlock

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles