

Kemble

3 COLOURS / 4 SIZES / 2 FINISHES / 0 SPECIAL PIECES

Building on the success of existing indoor/outdoor ranges, we are introducing a new multiformat option. Kemble is a soft limestone effect with minimal patterning that mimics natural stone and is available in three warm shades.

This interior tile is 8.5mm thick and is available in 29.8x59.8cm, 59.8x59.8cm and 59.8x119.8cm. There are also 20cm thick outdoor tiles available in a matching design in 59.8x59.8cm and 59.8x89.8cm.



Kemble




Kemble




Ivory




Sand

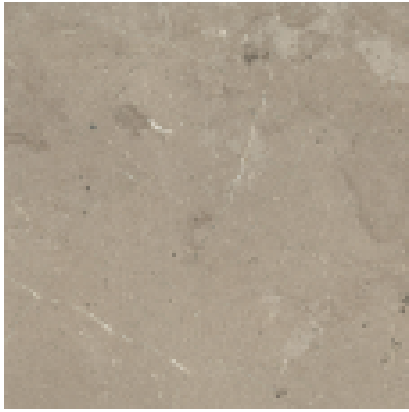


Grey




598x1198x8.5



598x898x20



598x598x8.5
598x598x20



298x598x8.5

Porcelain	8.5mm thick	20mm thick	Wall/floor	Interior/exterior
	Matt		All tiles	All tiles
298x598	✓		Wall & Floor	Interior & Exterior
598x598	✓	✓	Wall & Floor	8.5mm Interior & Exterior 20mm Exterior Only
598x898		✓		Exterior Only
598x1198	✓		Wall & Floor	Interior & Exterior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Kemble

GROUP / BLa - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$\leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300\text{N}$	$\geq 1300\text{N}$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	$\geq 35 \text{ N/mm}^2$
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	×

Recycled Content	5 %
Range Name	Kemble

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles