#### 14 COLOURS / 3 SIZES / 1 FINISH / MOSAICS

A precious palette of 14 shades selected by architect Piero Lissoni. A wide decorative range and a calibrated, harmonious colour palette to mix and match. With plain wall tiles in 50x120 décor wall tiles in 40x50, 50x120 and 120x278, brick mosaic sheets in 33x47 and porcelain 6mm tiles in 120x278 Dawson Colour is a great way to add subtle colour to any space.










Salix Mint Pure Moon Dove Linen Mauve Pebble Cream Sun Jade Teal Iris Wall Tiles ±8.5 mm 50x120 cm - 195/8"x471/4" Matte 120x278 cm - 471/4"x1091/2"

# Frog 50x120cm and 120x278cm

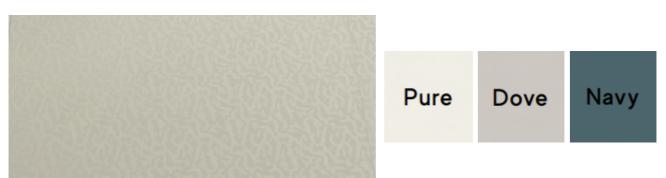

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

#### 3D Pleat 50x120cm



Linen Mauve Jade Iris

#### Shade 50x120cm





The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W:  $\underline{www.parkside.co.uk} - E: \underline{info@parkside.co.uk}$ 

#### Ruler 40x50cm



Linen Mauve Jade Iris

#### Shade 50x120cm



Pure	Moon	Dove	Linen	Mauve
Pebble	Cream	Sun	Salix	Mint
Jade	Teal	Iris	Navy	

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W:  $\underline{www.parkside.co.uk} - E: \underline{info@parkside.co.uk}$ 

	8.5mm thick	9mm thick	Wall/floor	Interior/exterior
Ceramic	Matt	Matt	All tiles	All tiles
500x1200 Plain		~	Wall Only	Interior Only
500x1200 Frog	~		Wall Only	Interior Only
500x1200 3D Pleat	~		Wall Only	Interior Only
500x1200 Shade	~		Wall Only	Interior Only
400x500 Ruler	<b>~</b>		Wall Only	Interior Only
330x370 Brick Mosaic	v		Wall Only	Interior Only

	6mm thick	Wall/floor	Interior/exterior
Porcelain	Matt	All tiles	All tiles
1200x2780 Plair	· ·	Wall & Floor	Interior Only
500x1200 Frog	•	Wall & Floor	Interior Only

# **Dawson Colour Wall**

GROUP / BIII - CERAMIC

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.5% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	Eb >10%	>10%
Breaking Strength	ISO 10545-4	≥ 600N	≥ 600N
Modulus of Rupture	ISO 10545-4	Ave Minimum 12 N/mm²	15 N/mm²
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to Stain	ISO 10545-14	Min Class 3	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1

Recycled Content	0 %
Range Name	Dawson Colour

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W:  $\underline{www.parkside.co.uk} - E: \underline{info@parkside.co.uk}$ 

# **Glazed Colour Floor**

#### GROUP / BLa - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	E <sub>b</sub> ≤ 0.5%	≤ 0.5%
Breaking Strength	ISO 10545-4	≥ 1300N	≥ 1000N
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm <sup>2</sup>	40 N/mm²
Resistance to deep abrasion (unglazed tiles)	ISO 10545-7	≤175mm2	≤150mm2
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	×

Range Name Dawson Colour	0%	Recycled Content
Nange Name Bawson Colodi	Dawson Colour	Range Name

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.