


Canti

7 COLOURS | 1 SIZE | 2 FINISHES

Canti is an extraordinary range of 3D wall tiles across 7 colours, 3 designs and 2 finishes. Ideal for creating a sophisticated statement on any wall, Canti has a vast colour palette, providing an option for any space.



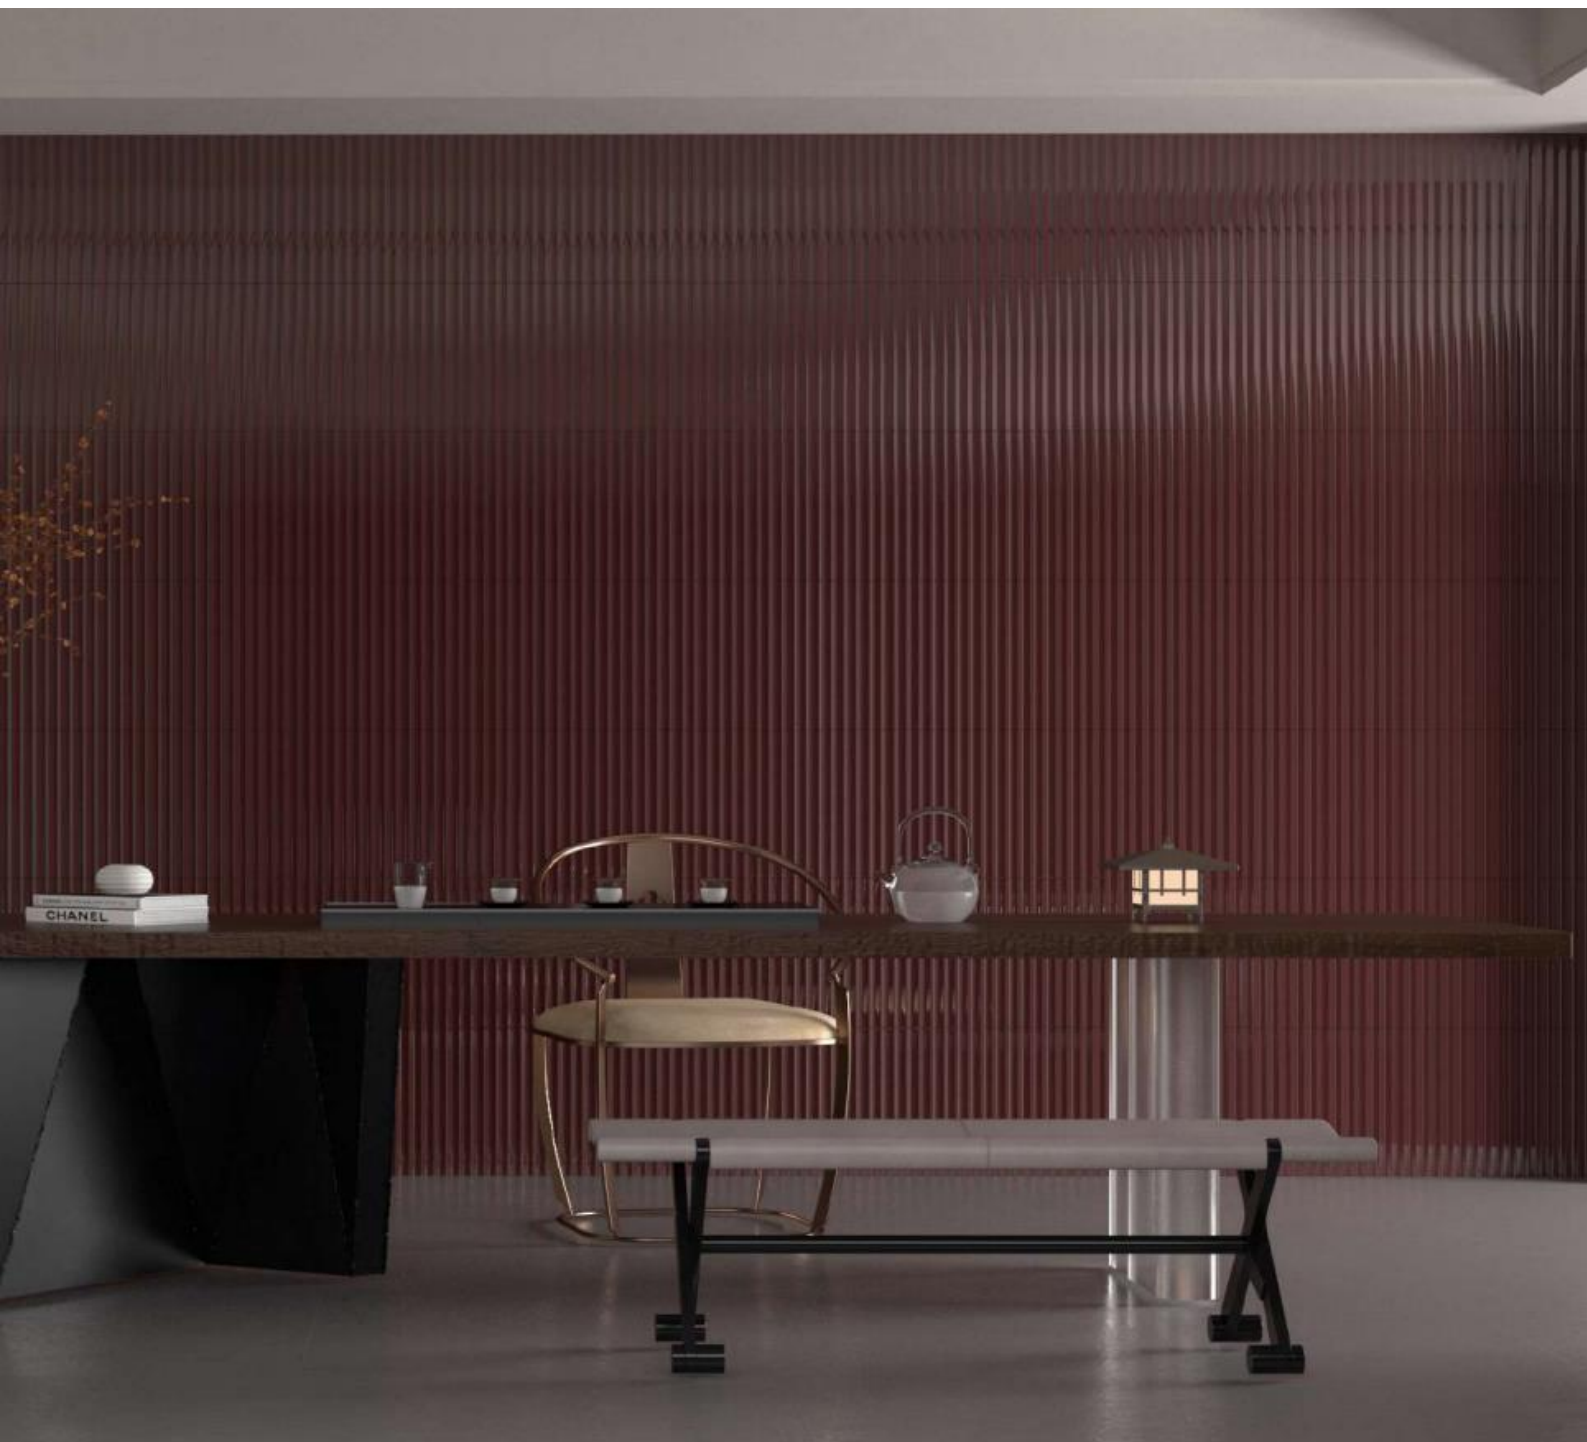

Canti



E238228
White V-Ribbed Gloss



E238230
Bone V-Ribbed Gloss



E238232
Khaki V-Ribbed Gloss



E238256
White Reeded Gloss



E238258
Bone Reeded Gloss



E238260
Khaki Reeded Gloss



E238242
White V-Ribbed Matt



E238244
Bone V-Ribbed Matt



E238246
Khaki V-Ribbed Matt



E238270
White Reeded Matt



E238272
Bone Reeded Matt



E238274
Khaki Reeded Matt




E238234
Almond V-Ribbed Gloss



E238236
Ginger V-Ribbed Gloss



E238238
Olive V-Ribbed Gloss



E238240
Baltic Blue V-Ribbed Gloss



E238262
Almond Reeded Gloss



E238264
Ginger Reeded Gloss



E238266
Olive Reeded Gloss



E238268
Baltic Blue Reeded Gloss



E238248
Almond V-Ribbed Matt



E238250
Ginger V-Ribbed Matt



E238252
Olive V-Ribbed Matt



E238254
Baltic Blue V-Ribbed Matt



E238276
Almond Reeded Matt



E238278
Ginger Reeded Matt



E238280
Olive Reeded Matt



E238282
Baltic Blue Reeded Matt

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Canti

GROUP / BIII - CERAMIC

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.5% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	Eb >10%	>10%
Breaking Strength	ISO 10545-4	≥ 600N	≥ 600N
Modulus of Rupture	ISO 10545-4	Ave Minimum 12 N/mm ²	>15 N/mm ²
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Pass
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to Stain	ISO 10545-14	Min Class 3	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1

Recycled Content	0 %
Range Name	Canti

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles