

Zenn LVT

12 COLOURS

Planks or tiles. Herringbone or concrete-look. Glue down or click installation. New-build or renovation. In the home or in a commercial space. With (click) or without integrated underlay (glue down). Whatever you're looking for, Zenn offers a perfect solution.

Besides all the perks of a vinyl floor, this collection provides the most beautiful and authentic look of nature. Whatever you opt for, this collection puts quality and beauty right at your feet.

Zenn 30 has a 0.3mm wear layer for moderate residential use and is available in both rigid click (2G) with integrated underlay, or glue-down.

Zenn 55 has a 0.55mm wear layer for intensive commercial use and is available in both rigid click (5G) with integrated underlay, or glue-down.

Glue-down is ideal if you want the floor to be extremely stable, whereas the rigid click is perfect for a speedy installation.



Zenn LVT



WOOD EFFECT

All colours and designs are available in the following options and are sold per pack:

Rigid Click Planks (30)

- 177.8x1219.2x5mm
- 0.3mm wear layer (residential)
- 4 sided micro bevels
- Rigid click 2G locking system
- Integrated acoustic underlay

Glue-down Planks (30)

- 177.8x1219.2x2mm
- 0.3mm wear layer (residential)
- 4 sided micro bevels
- Glue-down

Rigid Click Planks (55)

- 177.8x1219.2x6mm
- 0.55mm wear layer (commercial)
- 4 sided micro bevels
- Rigid click 5G locking system
- Integrated acoustic underlay

Glue-Down Planks (55)

- 177.8x1219.2x2.5mm
- 0.55mm wear layer (commercial)
- 4 sided micro bevels
- Glue-down

Herringbone Rigid Click (55)

- 107.9x609.6x6mm
- 0.55mm wear layer (commercial)
- 4 sided micro bevels
- Rigid click 5G locking system
- Integrated acoustic underlay

Herringbone Glue-Down (55)

- 114.3x609.6x2.5mm
- 0.55mm wear layer (commercial)
- 4 sided micro bevels
- Glue-down



PALERMO



MONSANTO




OSLO




ORLANDO



PORTO



SORRENTO



CAIRO



FARO

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

STONE EFFECT

All colours and designs are available in the following options and are sold per pack:

Rigid Click Tiles (30)

- 457.2x914.4x5mm
- 0.3mm wear layer (residential)
- 4 sided micro bevels
- Rigid click 2G locking system
- Integrated acoustic underlay

Glue-Down Tiles (30)



- 457.2x914.4x2mm
- 0.3mm wear layer (residential)
- 4 sided micro bevels
- Glue-down

Rigid Click Tiles (55)

- 457.2x914.4x6mm
- 0.55mm wear layer (commercial)
- 4 sided micro bevels
- Rigid click 5G locking system
- Integrated acoustic underlay

Glue-down Tiles (55)

- 457.2x914.4x2.5mm
- 0.55mm wear layer (commercial)
- 4 sided micro bevels
- Glue-down

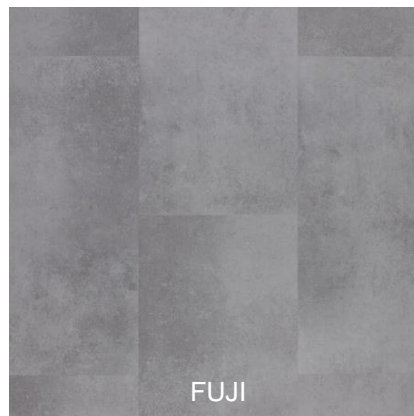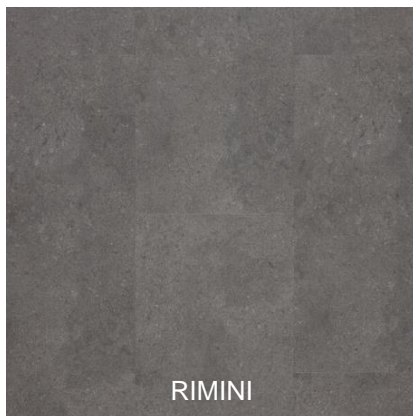

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Technical

	ZENN 30		ZENN 55		ZENN 55 Herringbone	
	Rigid click with integrated underlay	Glue down	Rigid click with integrated underlay	Glue down	Rigid click with integrated underlay	Glue down
Wearlayer (mm)	0,30 mm		0,55 mm			
Embossing	Wood & stone emboss		Wood & stone emboss		Wood emboss	
Thickness (mm)	4 + 1	2	5 + 1	2,5	5 + 1	2,5
Integrated underlay	✓	No	✓	No	✓	No
Lock	2G	No	5G	No	5G	No
Class	23/32	23/31	23/33	23/33/42	23/33	23/33/42
Commercial warranty	5 years		3 years		10 years	
Residential warranty	20 years		15 years		Lifetime	

Test results

Underfloor heating	suitable max. 27° (80°F) / electrical floor heating systems: max 60 W/m ²		suitable max. 27° (80°F) / electrical floor heating systems: max 60 W/m ²			
Castor chair	pass		pass			
Fire resistance	Bfl-s1		Bfl-s1			
Light fastness	> 6		> 6			
Chemical resistance	OK		OK			
Residual indentation	< 0,1 mm		< 0,1 mm			
Thermal resistance	0,025 m ² K/W	0,010 m ² K/W	0,030 m ² K/W	0,010 m ² K/W	0,030 m ² K/W	0,010 m ² K/W
Slip resistance	R10		R10			
	class DS		class DS			
Sound reduction: Impact sound	19 dB	2dB	19 dB	2dB	19 dB	2dB
Dimensional stability	< 0,15 % - pass		< 0,15 % - pass			
Lock Strength	> 1,5 kN/m - pass	/	> 1,5 kN/m - pass	/	> 1,5 kN/m - pass	/

Planks & herringbone

	ZENN 30		ZENN 55		ZENN 55 Herringbone	
	Planks m ² per pack	Planks m ² per pack	Planks m ² per pack	Planks m ² per pack	Planks m ² per pack	Planks m ² per pack
Planks m ² per pack	2,17 m ²	5,20 m ²	1,73 m ²	4,34 m ²	1,97 m ²	4,46 m ²
Planks per pack	10 pieces	24 pieces	8 pieces	20 pieces	30 pieces	64 pieces
m ² per pallet	97,55 m ²	234,11 m ²	78,04 m ²	195,09 m ²	78,96 m ²	187,29 m ²
Dimensions	L 1219,2 x W 177,8 mm		L 1219,2 x W 177,8 mm		L 609,6 x W 107,95 mm	L 609,6 x W 114,3 mm

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	Supplier declares this range as an R10. PTV testing can be completed on request.

Recycled Content	0 %
Range Name	Zenn LVT

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk