

PARKSIDE

PARLATO

MARBLE EFFECT TILES



Golden White

7

COLOURS

5

SIZES

3

FINISHES

0

SPECIAL PIECES



0%

The Parlato collection combines the elegance of 7 marbles translated into stoneware: glossy and matt surfaces combined with an irresistible contemporary appeal accentuated by the size of the slabs, including the new 6mm-thick 1600x3200mm.



Altissimo, Golden White, Calacatta Extra and Saint Laurent are also available in a satin finish.

PORCELAIN	6mm			Wall/ Floor	Interior/ Exterior
	Matt	Lux	Satin	All Tiles	All Tiles
1200X1200	✓	✓		Wall & Floor	Interior & Exterior
1200X2400	✓	✓		Wall & Floor	Interior & Exterior
1200X2780		✓	✓	Wall & Floor	Interior & Exterior
1600x3200	✓	✓		Wall & Floor	Interior & Exterior

PARKSIDE

PARLATO

MARBLE EFFECT TILES

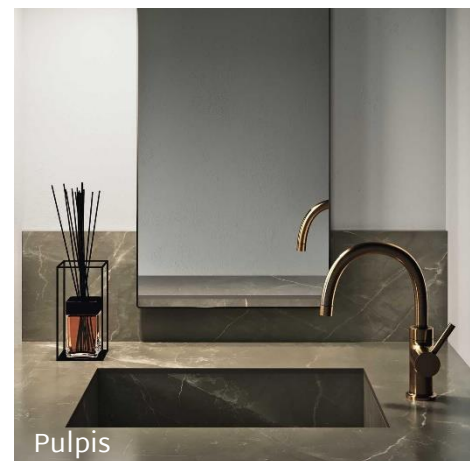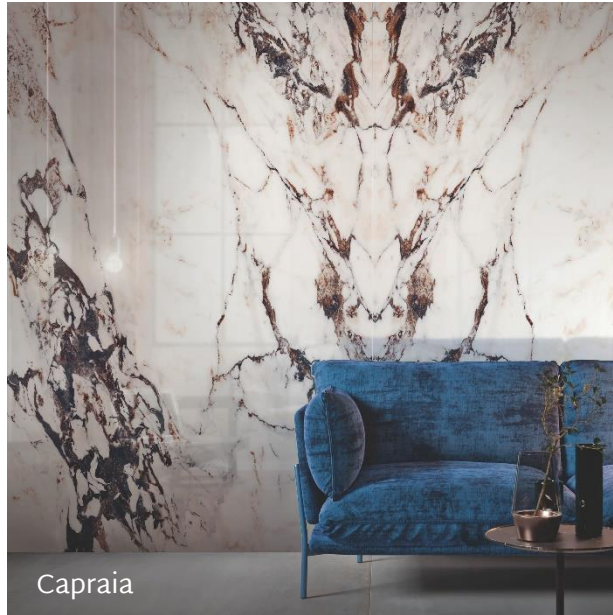

Group	Bla – Porcelain		
	Standard	Requirement	Established Values
Length & Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	Eb ≤ 0.5 %	≤ 0.5 %
Breaking strength	ISO 10545-4	≥ 1300N	≥ 1300N
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm2	Ave 35 N/mm2
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	≤175mm2	Ave ≤150mm2
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULB
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire	-	Class A1 A1/FL	A1 A1/FL

Recycled Content	%
Parlato	0%

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential