

PARKSIDE

MINTON HOLLINS

MINTON HOLLINS CERAMIC RANGE



5

COLOURS

2

SIZES

1


FINISH

3

SPECIAL PIECES

Minton Hollins is a beautiful collection of glossy ceramic wall tiles. Available in varying sizes, patterns and colours. The range is complemented by 3 finishing pieces; skirting, capping & borders.

COLOURS AVAILABLE

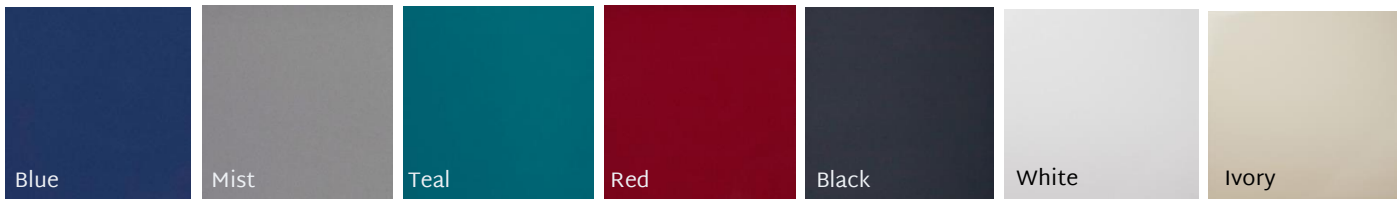

STYLES AVAILABLE




SPECIAL PIECES



SIZE GUIDE

150x150mm

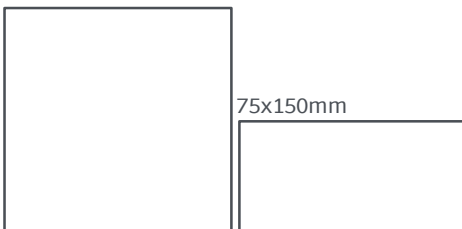

SPECIAL PIECES

Skirting
150x150mm



Border & Capping
75x150mm





| | |
|-------------------|----------|
| Dimensions | Multiple |
| Finish | Gloss |
| Body | Ceramic |
| Wall/Floor | Wall |
| Interior/Exterior | Interior |
| Group | BIII |
| Pendulum Dry | - |
| Pendulum Wet | - |

| Available Sizes |
|---|
| 150x75x9mm 150x150x8mm* |
| 150x75x2.2mm – Capping 150x150x1.7mm - Skirting 150x75x9.5mm - Border *Depth varies between plain & décor tiles. |

| | Standard | Requirement | Typical Test Value |
|--------------------------------|--------------|--|--------------------|
| Length & Width | ISO 10545-2 | $\pm 0.5\% \leq 2\text{mm}$ | Pass |
| Thickness | ISO 10545-2 | $\pm 10\%$ $\leq \pm 0.5\text{mm}$ | Pass |
| Straightness | ISO 10545-2 | $\pm 0.3\%$ $\leq \pm 1.5\text{mm}$ | Pass |
| Flatness | ISO 10545-2 | $\pm 0.5\%$ $\leq \pm 2.0\text{mm}$ | Pass |
| Rectangularity | ISO 10545-2 | $\pm 0.5\%$ $\leq \pm 2.0\text{mm}$ | Pass |
| Water Absorption | ISO 10545-3 | $E_b > 10\%$ | Pass |
| Breaking strength | ISO 10545-4 | $\geq 600\text{N}$ | Pass |
| Modulus of rupture | ISO 10545-4 | 12 N/mm ² Average min | Pass |
| Resistance to surface abrasion | ISO 10545-7 | n/a | n/a |
| Frost Resistance | ISO 10545-12 | Complies with Standard | Not resistant |
| Thermal Shock Resistance | ISO 10545-9 | Complies with Standard | Pass |
| Resistance to Stain | ISO 10545-14 | Min class 3 | Pass |
| Resistance to chemicals | ISO 10545-14 | Min Class B | Pass |
| Reaction to Fire | - | Floor/Wall class A1 FL/A1 | Pass |

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential