


# Hester

6 COLOURS / 5 SIZES / 1 FINISHES / 0 SPECIAL PIECES

Hester is a beautiful collection of stone effect tiles, replicating natural volcanic stone with a Raku look glaze in six subtle shades. Standard sizes available are 600x600mm, 600x300mm, 600x100mm and 75x300mm. There's also a three-dimensional décor called Kaptur available in 600x300mm and Link, a hexagonal pattern available in 196x342mm. This range has 12% recycled content.



Hester

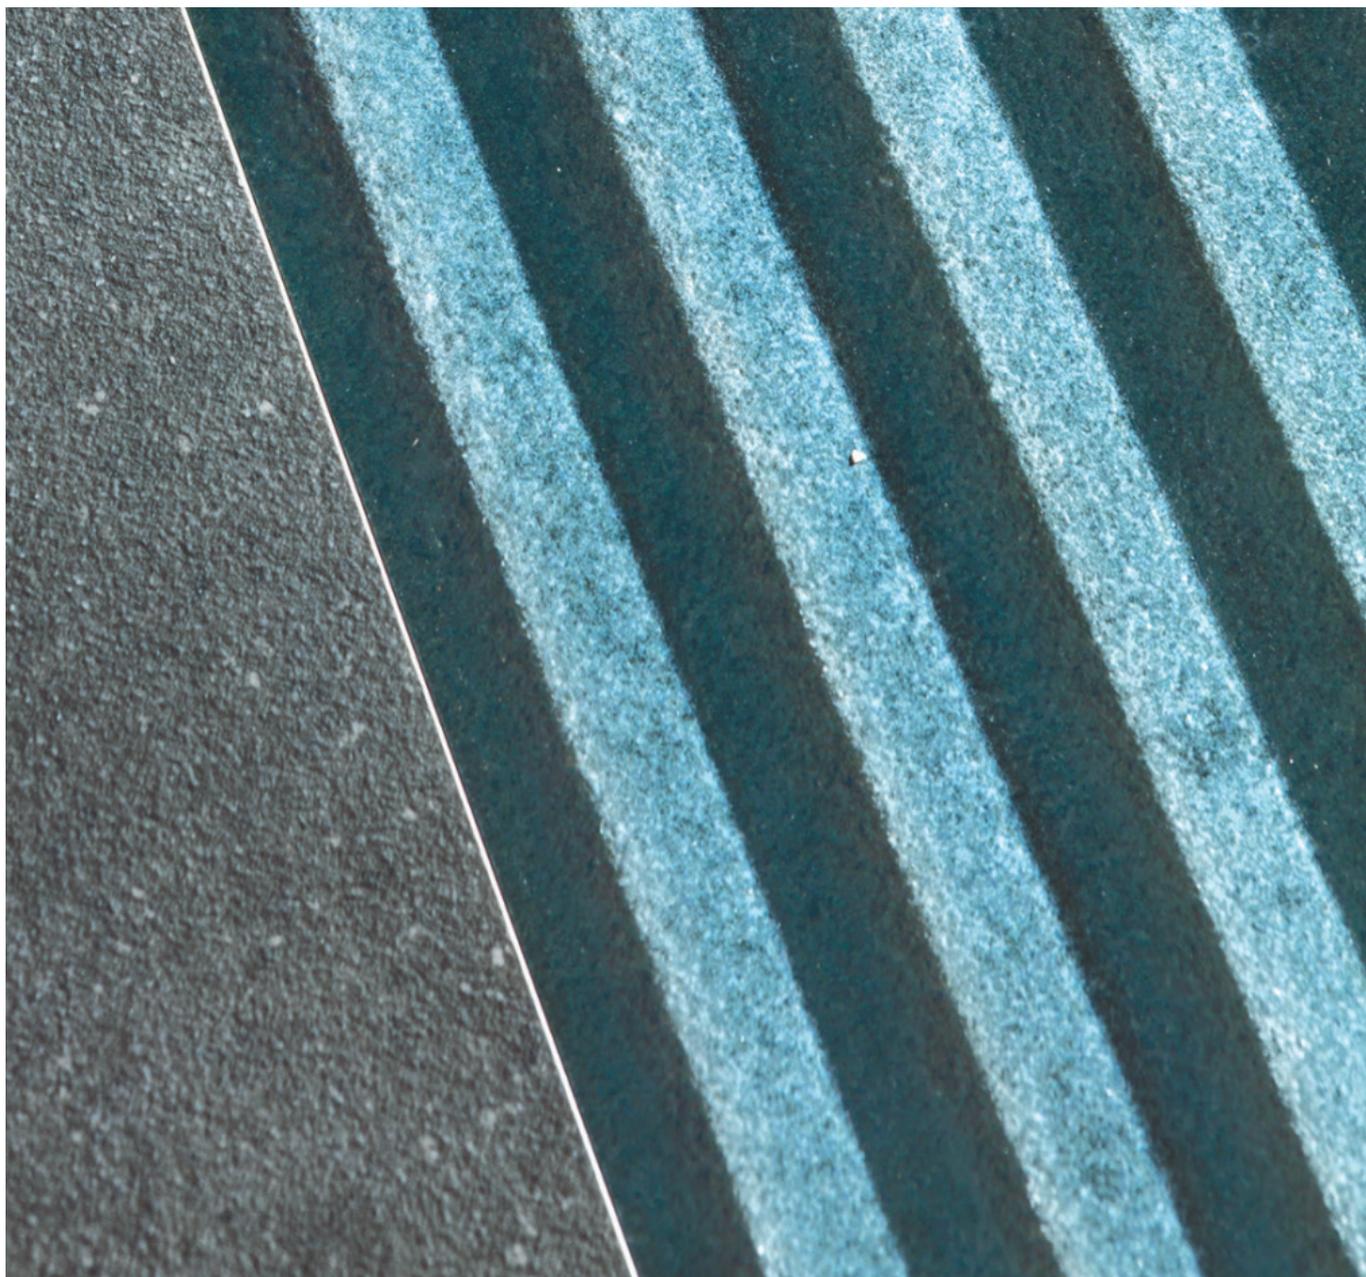

Hester



# Hester




RAKU BIANCO



RAKU RUGGINE




RAKU OCRA



RAKU VERDE



RAKU BLU



RAKU NERO



KAPTUR BIANCO



KAPTUR RUGGINE



KAPTUR OCRA



KAPTUR VERDE



KAPTUR BLU



KAPTUR NERO

---

## Available sizes

---

305x605mm

---

605x605mm

---

300x300mm mozaic

---

610x150mm 3D mosiac

---

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Hester



LINK BIANCO



LINK RUGGINE



LINK OCRA



LINK VERDE



LINK BLU



LINK NERO


Porcelain	10mm thick	Wall/floor	Interior/exterior
	Matt	All colours	All colours
75x300	✓	Wall and floor	Interior and exterior
100x600	✓	Wall and floor	Interior and exterior
300x600	✓	Wall and floor	Interior and exterior
600x600	✓	Wall and floor	Interior and exterior
196x342 Hex	✓	Wall	Interior and exterior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

# Hester

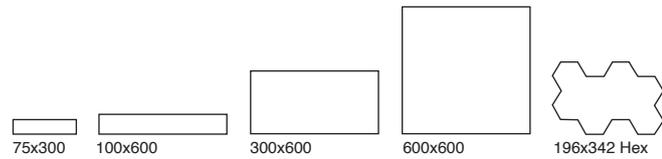

## GROUP / Bla - PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	$\leq 0.5\%$
Breaking strength	ISO 10545-4	$\geq 1300N$	Ave $\geq 2000N$
Modulus of rupture	ISO 10545-4	Ave Minimum $\geq 35 N/mm^2$	Ave $50 N/mm^2$
Resistance to surface abrasion	ISO 10545-7	Declare Class	Bianco – PEI 5 Ocra – PEI 4 Ruggine, Verde, Blu and Nero – PEI 3
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to stain	ISO 10545-14	Declare Value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
Hester	12

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: [www.parkside.co.uk](http://www.parkside.co.uk) – E: [info@parkside.co.uk](mailto:info@parkside.co.uk)

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles