

Scalla

5 COLOURS / 1 SIZES / 1 FINISHES / 0 SPECIAL PIECES

Bring an Art Deco influence to your interiors with the 1920s inspired fan shape of the Scalla. This distinctive design is also evocative of a teardrop - a regularly reoccurring pattern in Moroccan culture - and a fish scale when turned on its side. Versatile in nature, its gloss finish will lend a statement feel to your interior. Note: you can leave the top edge uncut for a scalloped look, but this tile's edges are not fully glazed due to their production method.



Scalla




Scalla



NATURAL LINEN



NORDIC BLUE

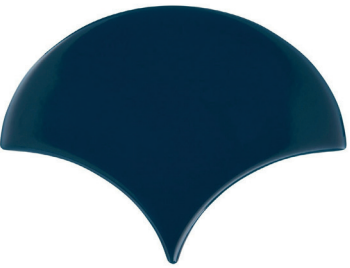

MIDNIGHT BLUE



FRESH SAGE



PEACOCK GREEN

Dimensions	150x400x9mm
Finish	Gloss
Body	Ceramic
Wall/floor	Wall
Group	BIII

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Scalla

GROUP / BIII - CERAMIC

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±10% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water absorption	ISO 10545-3	Eb >10%	>10%
Breaking strength	ISO 10545-4	≥ 600N	> 600N
Modulus of rupture	ISO 10545-4	Ave Minimum 12 N/mm ²	Ave 12 N/mm ²
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare value	NPD
Resistance to stain	ISO 10545-14	Min Class 3	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Recycled content	%
Scalla	39

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles