

Arzua

3 COLOURS / **1** SIZES / **1** FINISHES / **0** SPECIAL PIECES


Terrazzo continues to trend in many commercial spaces. Arzua offers a different format to our current portfolio in 223x223mm. This smaller format allows clients to add pops of colour to a scheme, on the other hand the porcelain substrate and PTV finish also allow for it to be considered for larger coverage floor spaces.




Arzua




Arzua

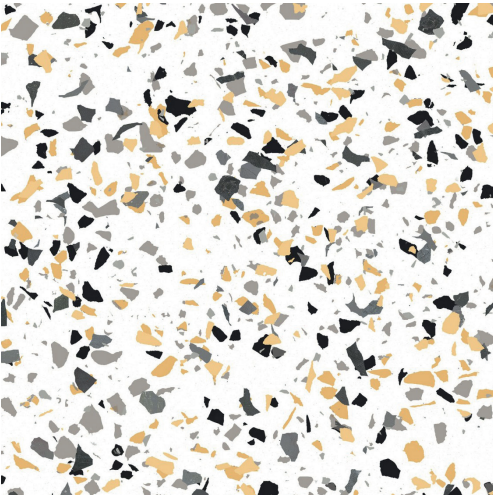

WHITE

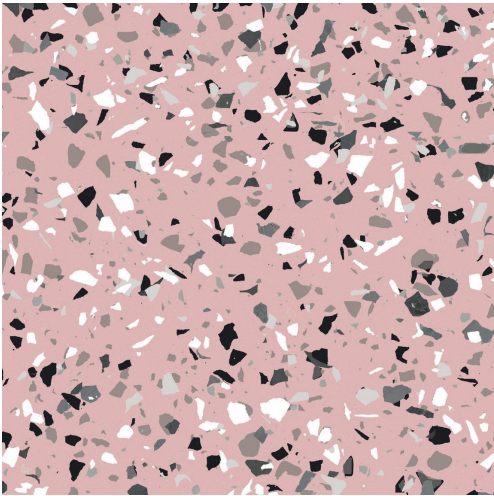

PINK

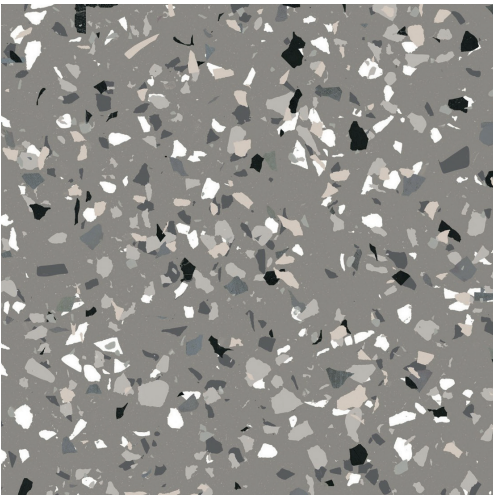


GREY

Ceramic	10mm	Wall/floor	Interior/exterior
	Matt	All tiles	All tiles
223x223	✓	Wall and floor	Interior and exterior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles



223x223

GROUP / Bla PORCELAIN

Range	Standard	Requirement	Established values
Length and width	ISO 10545-2	$\pm 0.6\% \sim \pm 2\text{mm}$	Conforms
Thickness	ISO 10545-2	$\pm 5\% \sim \pm 0.5\text{mm}$	Conforms
Straightness	ISO 10545-2	$\pm 0.5\% \sim \pm 1.5\text{mm}$	Conforms
Flatness	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Rectangularity	ISO 10545-2	$\pm 0.5\% \sim \pm 2.0\text{mm}$	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	$\leq 0.5\%$
Breaking strength	ISO 10545-4	$\geq 1300\text{N}$	$\geq 1300\text{N}$
Modulus of rupture	ISO 10545-4	35 N/mm ² Average min	35 N/mm ² Average min
Resistance to deep abrasion	ISO 10545-7	Declare Class	PEI 4
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare value	GLA
Resistance to stain	ISO 10545-14	Declare value	Class 5
Reaction to fire	-	Class A1 A1/FL	A1 A1/FL

Slip resistance characteristics	Pendulum Dry (4S Slider 96) +36 PTV	Pendulum Wet (4S Slider 96) +36 PTV	Pendulum Wet (4S Slider 55) +36 PTV	Recycled content	%
Arzua	+36	+36	+36	Arzua	30-39

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles