

Camden

6 COLOURS / 1 SIZE / 1 FINISH / 0 SPECIAL PIECES

Glazed porcelain in six bold colours, suitable for walls both indoors and outdoors. A beautiful curved 3D effect provides elegance with a dynamic edge. Sensations of light and shadow play across the surface, giving a dramatic effect.



Camden



Camden



Camden



WHITE



RED




GREEN



BLUE



COPPER

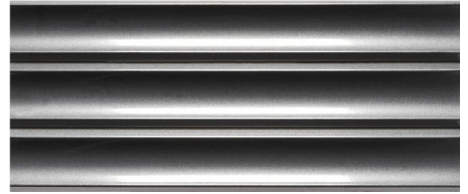

CHROME

Extruded porcelain	15mm thick	Wall/floor	Interior/exterior
	All tiles	All tiles	All tiles
170x400	Gloss	Wall	Interior & Exterior

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Camden

GROUP / A1a – EXTRUDED PORCELAIN

	Standard	Requirement	Established values
Length and width	ISO 10545-2	±2% to a max 4mm	Conforms
Thickness	ISO 10545-2	±10%	Conforms
Straightness	ISO 10545-2	±0.6%	Conforms
Flatness	ISO 10545-2	±1.5%	Conforms
Rectangularity	ISO 10545-2	±1.0%	Conforms
Water absorption	ISO 10545-3	$E_b \leq 0.5\%$	Ave $\leq 0.3\%$
Breaking strength	ISO 10545-4	$\geq 1300N$	$\geq 1300N$
Modulus of rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	Ave 35 N/mm ²
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare value	NPD – Wall Tile
Thermal shock resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA- White, Red, Green, Blue. GB – Copper, Chrome
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA- White, Red, Green, Blue GHB- Copper, Chrome
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA- White, Red, Green, Blue GLB- Copper, Chrome
Resistance to stain	ISO 10545-14	Declare Value	Class 5
Reaction to fire		Class A1 A1/FL	A1

Recycled content	%
Camden	0

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles