


Kaste01

3 COLOURS / 2 SIZES / 1 FINISH

Kaste01 is a porcelain tile collection featuring a new innovation in shower trays and available in three contemporary grey toned colours: basalt, grit and cement. The collection has a high slip resistance making this range a smart choice for wet rooms especially when coordinated with the Kaste01 shower tray to give your wet room a seamless finish.

The tile range consists of 3 colours in 2 formats of 600×600 & 900×900 with 1 co-ordinating shower tray format option in 900×1350.

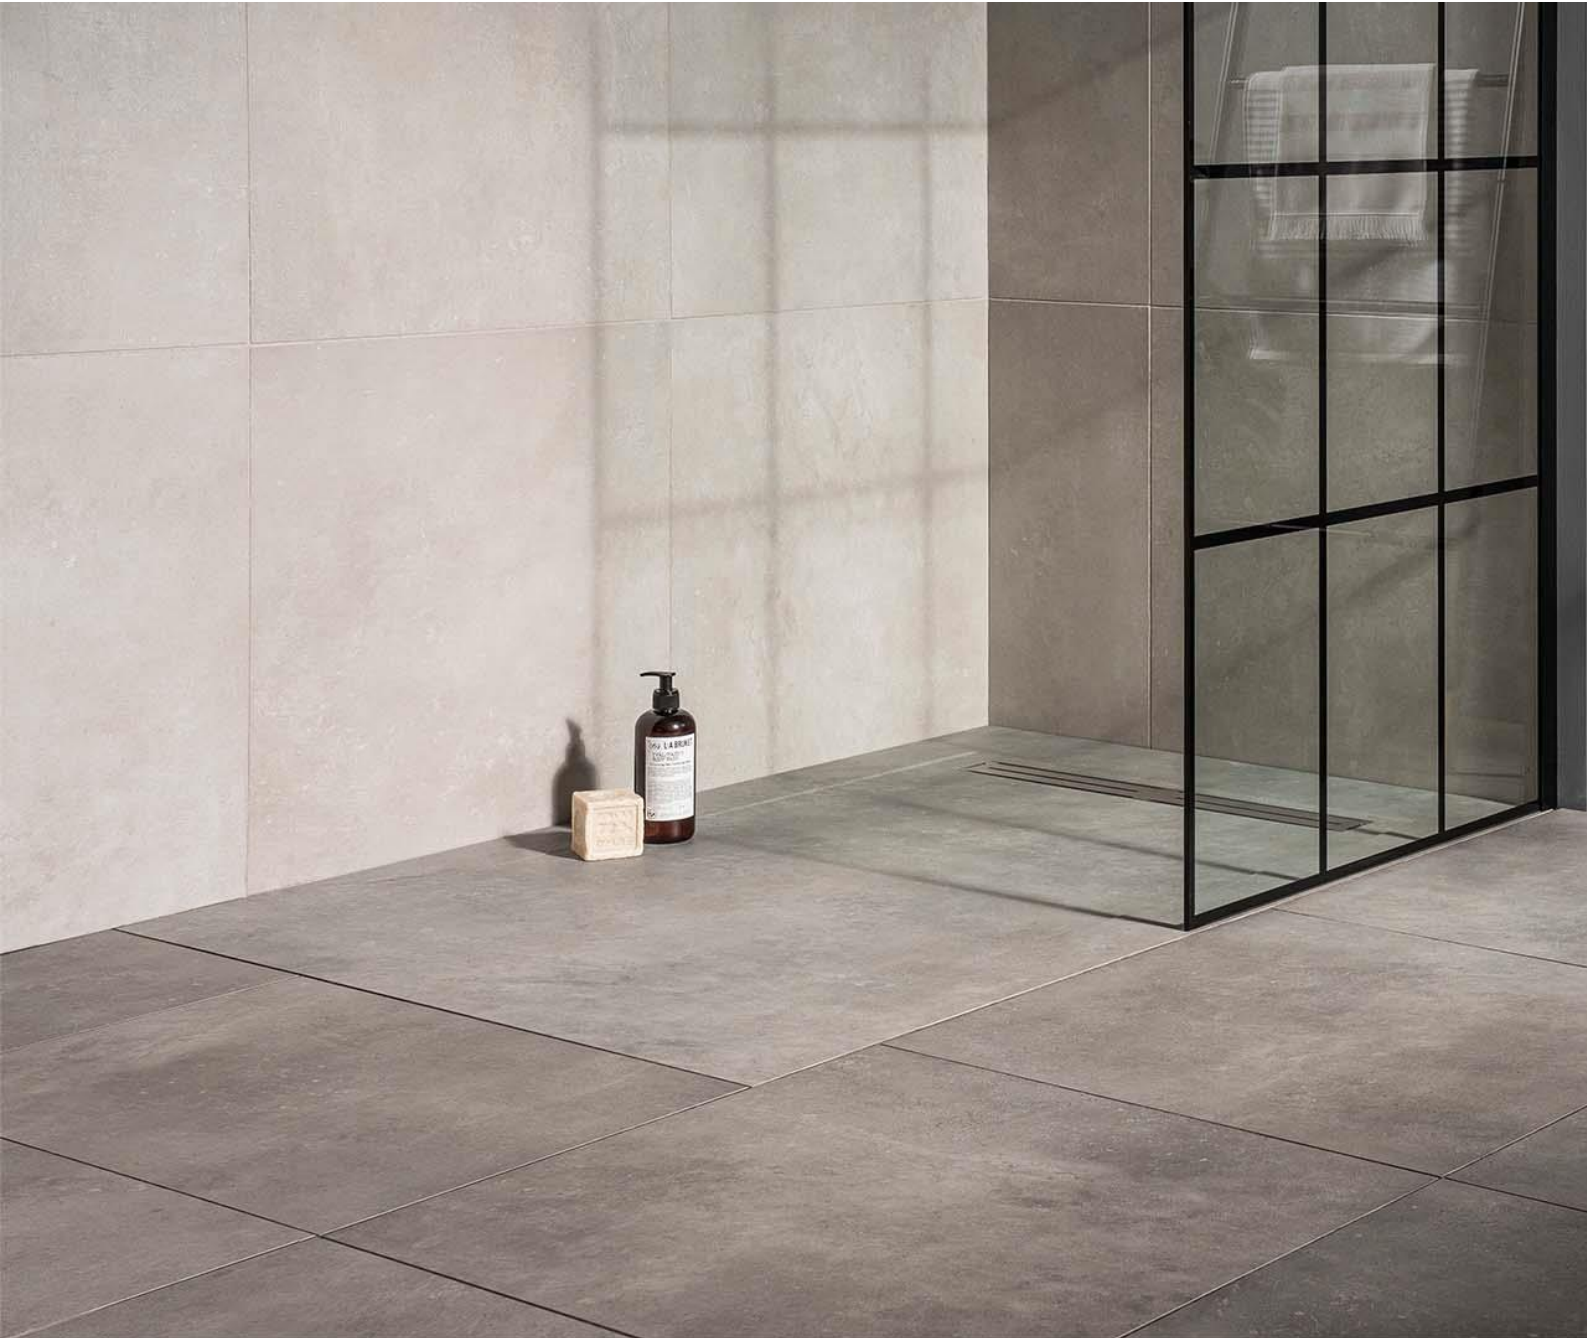


Kaste01



CEMENT



GRIT

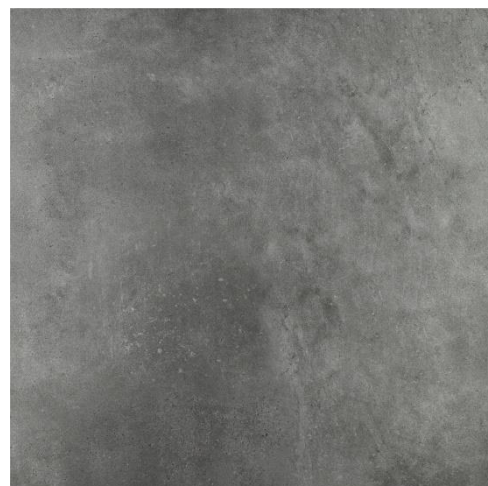

BASALT

Porcelain	9mm thick	10mm thick	14mm thick	Wall/floor	Interior/exterior
	Grip	Grip	Grip	All tiles	All tiles
600x600	✓			Wall & Floor	Interior & Exterior
900x900		✓		Wall & Floor	Interior & Exterior
900x1350 Shower Tray			✓	Floor Only	Interior



The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Kaste01

GROUP / BLa - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_w \leq 0.5\%$	$E_w \leq 0.6\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	Ave 3200N
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	52 N/mm ²
Resistance to deep abrasion (glazed tiles)	ISO 10545-7	Declare Value	PEI 3
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHA
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLA
Resistance to Stain	ISO 10545-14	Declare Value	Class 5
Reaction to Fire		Class A1 A1/FL	Class A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36	Pendulum Wet (TRL Slider 55) +36
Full Range	✓	✓	✓

Recycled Content	0 %
Range Name	Kaste01

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles