

Pigment

30 COLOURS / 10 SIZES / 3 FINISHES / MULTIPLE SPECIAL PIECES

The Pigment collection is a technical porcelain range which offers solutions for walls and floors, indoor and outdoor, public and residential spa, with technical and aesthetic characteristics that run through the entire thickness of the tile, giving it high resistance.

With 30 colours, 10 formats and 3 finishes in Porcelain, and a new ceramic wall tile offering, Pigment is the go-to range for plain colour technical projects.





Pigment



Pigment

GROUP / BLA - PORCELAIN

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.6% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	$E_b \leq 0.5\%$	$E_b \leq 0.5\%$
Breaking Strength	ISO 10545-4	$\geq 1300N$	$\geq 2000N$
Modulus of Rupture	ISO 10545-4	Ave Minimum 35 N/mm ²	Ave Minimum 45 N/mm ²
Resistance to deep abrasion (unglazed tiles)	ISO 10545-6	$\leq 175mm^2$	$\leq 120mm^2$
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Frost Resistance	ISO 10545-12	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class UB	UB
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	UHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	ULA
Resistance to Stain	ISO 10545-14	Declare Value	Class 3
Reaction to Fire		Class A1 A1/FL	Class A1 A1/FL

Slip Resistance Characteristics	Pendulum Dry (4S Slider 96) +36	Pendulum Wet (4S Slider 96) +36
Full Range	✓	✗


Recycled Content	0 %
Range Name	Pigment

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles

Pigment (Ceramic)

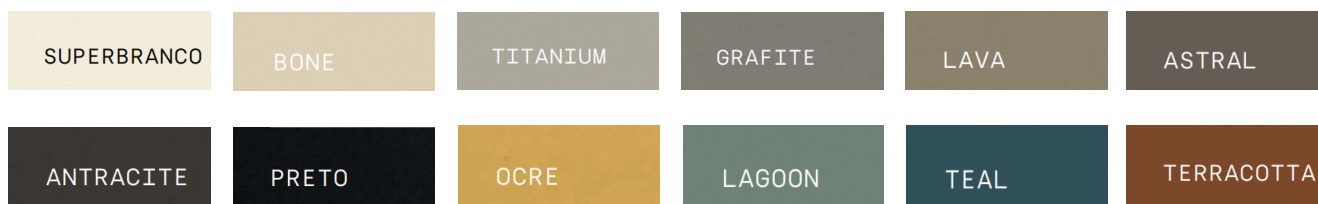

Ceramic	8.5mm thick	Wall/floor	Interior/exterior
	Matt	All tiles	All tiles
300x600	✓	Wall Only	Interior Only
295x592	✓	Wall Only	Interior Only



300x600x8.5

Pigment Ceramic

GROUP / BIII - CERAMIC

	Standard	Requirement	Established Values
Length and Width	ISO 10545-2	±0.5% ~ ±2mm	Conforms
Thickness	ISO 10545-2	±5% ~ ±0.5mm	Conforms
Straightness	ISO 10545-2	±0.5% ~ ±1.5mm	Conforms
Flatness	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Rectangularity	ISO 10545-2	±0.5% ~ ±2.0mm	Conforms
Water Absorption	ISO 10545-3	Eb >10%	>16 %
Breaking Strength	ISO 10545-4	≥ 600N	≥ 600N
Modulus of Rupture	ISO 10545-4	Ave Minimum 12 N/mm ²	> 15 N/mm ²
Thermal Shock Resistance	ISO 10545-9	Pass according to EN ISO 10545-1	Resistant
Resistance to household chemicals and swimming pool salts	ISO 10545-13	Min Class GB	GA
Resistance to high concentrations of alkalis and acids	ISO 10545-13	Declare Value	GHB
Resistance to low concentrations of alkalis and acids	ISO 10545-13	Declare Value	GLB
Resistance to Stain	ISO 10545-14	Min Class 3	Class 4
Reaction to Fire		Class A1 A1/FL	Class A1

Recycled Content	0 %
Range Name	Pigment

The colour representations shown in this data sheet are as accurate as the limitations of the printing process will allow. Due to the manufacturing process of our floor tiles there may be a small variation in the PTV value. The slip resistance values are correct at the time of testing and represent the standard production value. Inadequate cleaning and maintenance will lead to significant reduction in the slip resistance of any tiles. The pendulum test results have been displayed in line with H&S Executive guidelines whereby 0-24 represents high slip potential, 25-35 moderate slip potential & 36+ represents a low slip potential.

For further information contact: T: 0116 276 2532 – W: www.parkside.co.uk – E: info@parkside.co.uk

Strata Technical Tiles is the partner brand of Parkside Architectural Tiles